

# Soft triang0 - Pendant

## DATA SHEET

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

DATE: \_\_\_\_\_

### GENERAL

**Product Code:**

STP-450 / STP-600 / STP-900

**Luminaire Type:**

Pendant

**Body Construction:**


Highest grade extruded aluminum

**Body Surface Finishes:**

Texture White / Texture Black / Texture Grey /  
Any Other RAL color possible on Request

**IP Rating:**

40

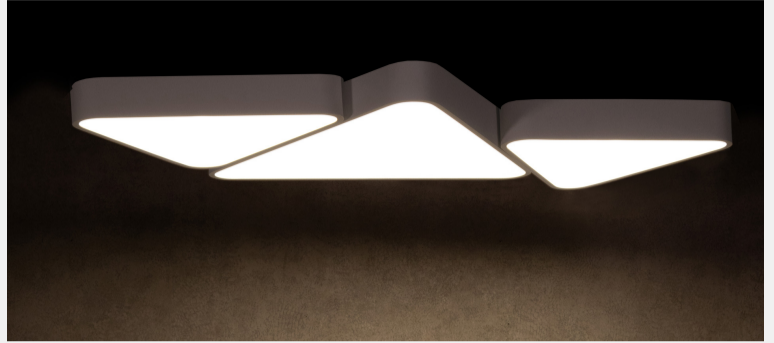

### PHYSICAL

**Dimension L x H:**

450x85mm 600x85mm 900x85mm

**Fixing System:**

1500 mm long steel wires with height  
adjustment system

### LED

**Light Source:**

LED

**CCT:**

3000K / 4000K / 5700K / TW (Tunable White)  
2700-6500K Possible only for 600 mm / 900 mm

**CRI:**

80+, 90+ (Available on request)

**MacAdam Step:**

3

### OPTICAL

**Light Distribution:**

Direct

**Diffuser:**

Satin Finished PC Opal Diffuser, Micro-  
Prismatic Diffuser

**UGR:**

< 22 with Opal Diffuser, < 19 with Micro-  
Prismatic Diffuser

### ELECTRICAL

**System Wattage:**

35W / 45W / 75W

**Luminous Flux:**

2450lm / 3150lm / 5250lm

**Power Factor:**

0.94

### DRIVER

Non-Dimmable

DALI Dimmable

0-10V Analogue

Bluetooth 4.0 CASAMBI remote control through App