

# Linear 40 Wall Direct

## DATA SHEET

### GENERAL

#### Product Code:

WM-40-D

#### Luminaire Type:

Wall Mounted

#### Body Construction:

Highest grade extruded aluminum Aluminum profile single max. length available in 3380mm

#### Body Surface Finishes:

Natural anodized finish / Texture White / Texture Black / Texture Grey / Any Other RAL color possible on Request (Any Contrast color also possible)

#### IP Rating:

40

### PHYSICAL

#### Dimension W x H x L\*:

40x75x1130mm

#### Fixing System:

Wall Mounted with Screw

### LED

#### Light Source:

LED

#### CCT:

3000K / 4000K / 5700K / TW (Tunable White)  
2700-6500K

#### CRI:

80+, 90+, (Available on request)

#### MacAdam Step:

3

### OPTICAL

#### Light Distribution:

Direct

#### Diffuser:

Satin Finished PC Opal Diffuser, Micro-Prismatic Diffuser

#### UGR:

< 22 with Opal Diffuser, < 19 with Micro-Prismatic Diffuser

### ELECTRICAL

#### System Wattage:

23W / 27W

#### Luminous Flux:

2047 lm at Luminaire level / 2295 lm at Luminaire level

#### Power Factor:

0.94

### DRIVER

Non-Dimmable

DALI Dimmable

0-10V Analogue Dimmable

Bluetooth 4.0 CASAMBI remote control through App



#### PROJECT:

#### TYPE:

#### NOTES:

#### QUANTITY:

#### DATE:

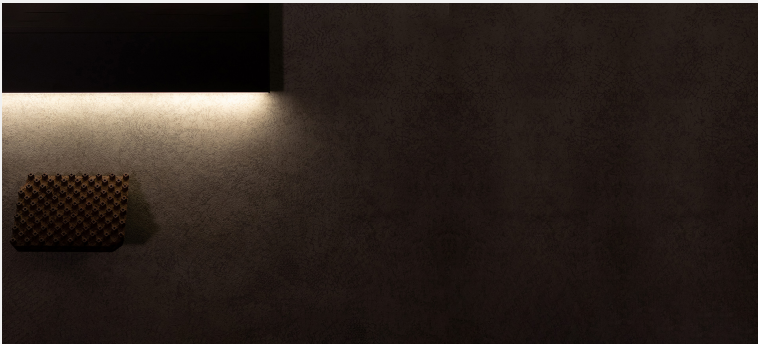

\*The length mentioned here is only for a single unit but can be changed as per your preference.

\*customized product, please contact us for required form and patterns.