


5

## Glide

Union of inspiration  
and function.  
Adds a pleasant  
atmosphere and  
lightness to any  
room.

---

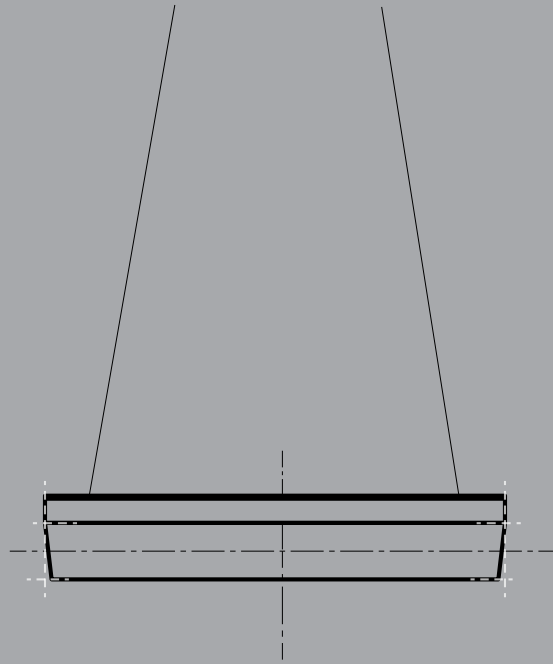








Indirect luminaire provides efficient light diffusion while conveying lightness.

Invisible light source provides high visual comfort.

Best used when indirect illumination is required.

## Glide




### PENDANT

Luminaire suspended from the ceiling with a transparent wire.

#### DIRECT

Downward light distribution provides uniform lighting.



**Product Code**  
GPM-I

**Luminaire Type**  
Pendant

**Dimension W x H x L\***  
172x43x1140 mm

**Fixing System**  
1500mm long steel wires with height adjustment system

**Couplers**  
90° Ceiling to ceiling, T shape, 120° Y shape

**Light Distribution**  
Indirect

**HE (High Efficiency)**  
30W (System Wattage)

**HO (High Output)**  
40W (System Wattage)

**HE Luminous Flux**  
2400 lm at Luminaire level

**HO Luminous Flux**  
3200 lm at Luminaire level

All Glide carry the following specifications

GENERAL	<b>Body Construction</b>	Highest grade extruded aluminum Aluminum profile single max. length available in 3380mm
	<b>Surface Finishes</b>	Natural anodized finish   Texture White   Texture Black   Texture Grey   Any Other RAL color possible on Request
	<b>End Cap</b>	Screw less End cap made of Aluminum
	<b>LED Batten</b>	Made of aluminum extrusion Good for Passive Cooling.
	<b>IP Rating</b>	40

LED	<b>Light Source CCT</b>	LED 3000K   4000K   5700K   TW (Tunable White) 2700-6500K
	<b>CRI</b>	80+, 90+ (Available on request)
	<b>MacAdam Step</b>	3

**Power Factor** 0.94  
Push-in Wago terminals for quick and easy wiring between two led modules  
Quick coupling BJB Connector to simplify connections between the subsequent modules.

**Diffuser** **Micro-Prismatic diffuser** from Germany with one mm color mixing sheet  
Diffuser single max. length available in 3380mm

**Driver** Non-Dimmable  
DALI Dimmable  
0-10V Analogue Dimmable  
Bluetooth 4.0  
CASAMBI remote control through App

All Glide are available in the following colours



\*The length mentioned here is only for a single unit but can be changed as per your preference.