


2

# Linear

Pure blend of  
light and form.  
Desired choice for  
adaptable, modest  
lighting solutions.

---

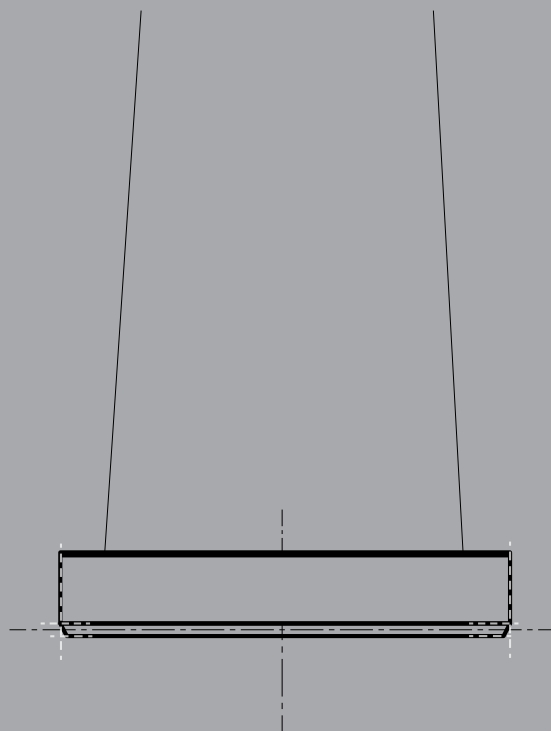




## What is Linear

LED profile for creating continuous line systems. Easily integrated into any architecture.

Produces ideal ambient lighting for any space.





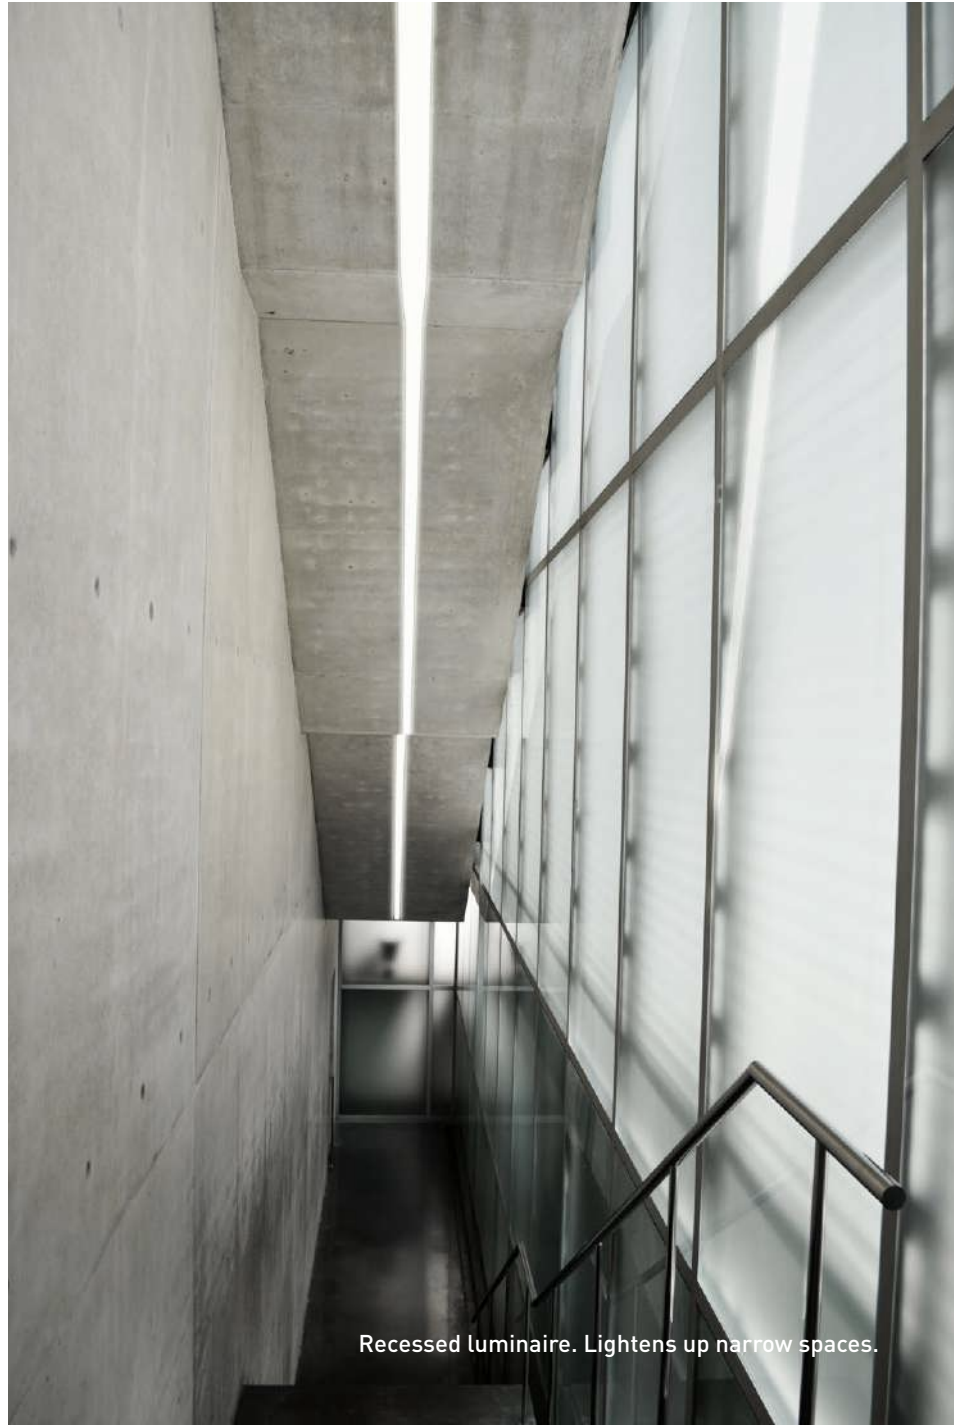


Recessed luminaire. Lightens up narrow spaces.



Linear  
with trim  
(applicable  
on 46 and 80)

Uniform  
lighting  
solution.

Even illumination creates  
**minimal distraction  
shadows** near joints  
or couplers.

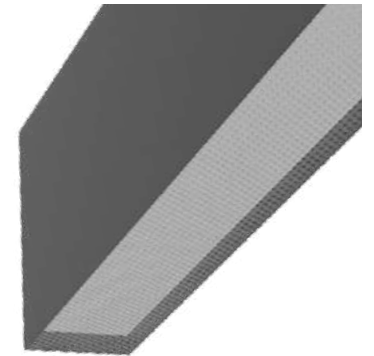

Stylishly  
adaptable  
design.

Easily customisable.  
Serves **multiple**  
interior design needs.




Aesthetic,  
functional  
luminaries.

Aesthetic. Elegant,  
optimal design, needing  
**no additional heat sink.**  
Outlasts traditional  
fluorescent tubes.




Recessed luminaries. Lighten up narrow spaces.

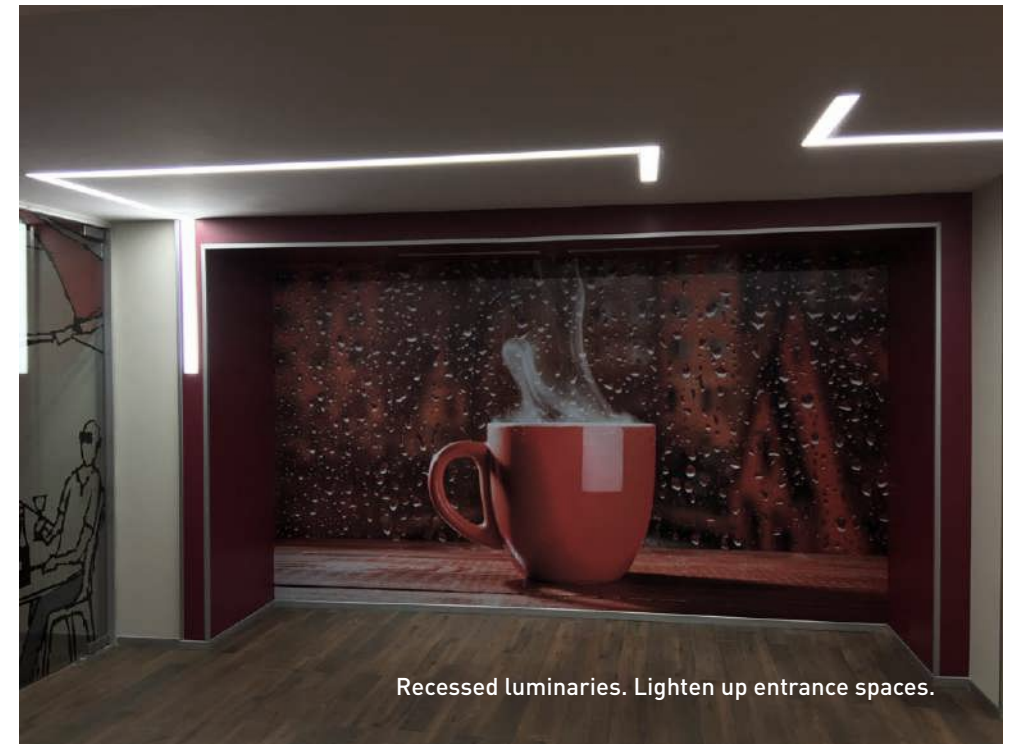

Recessed luminaries. Lighten up entrance spaces.



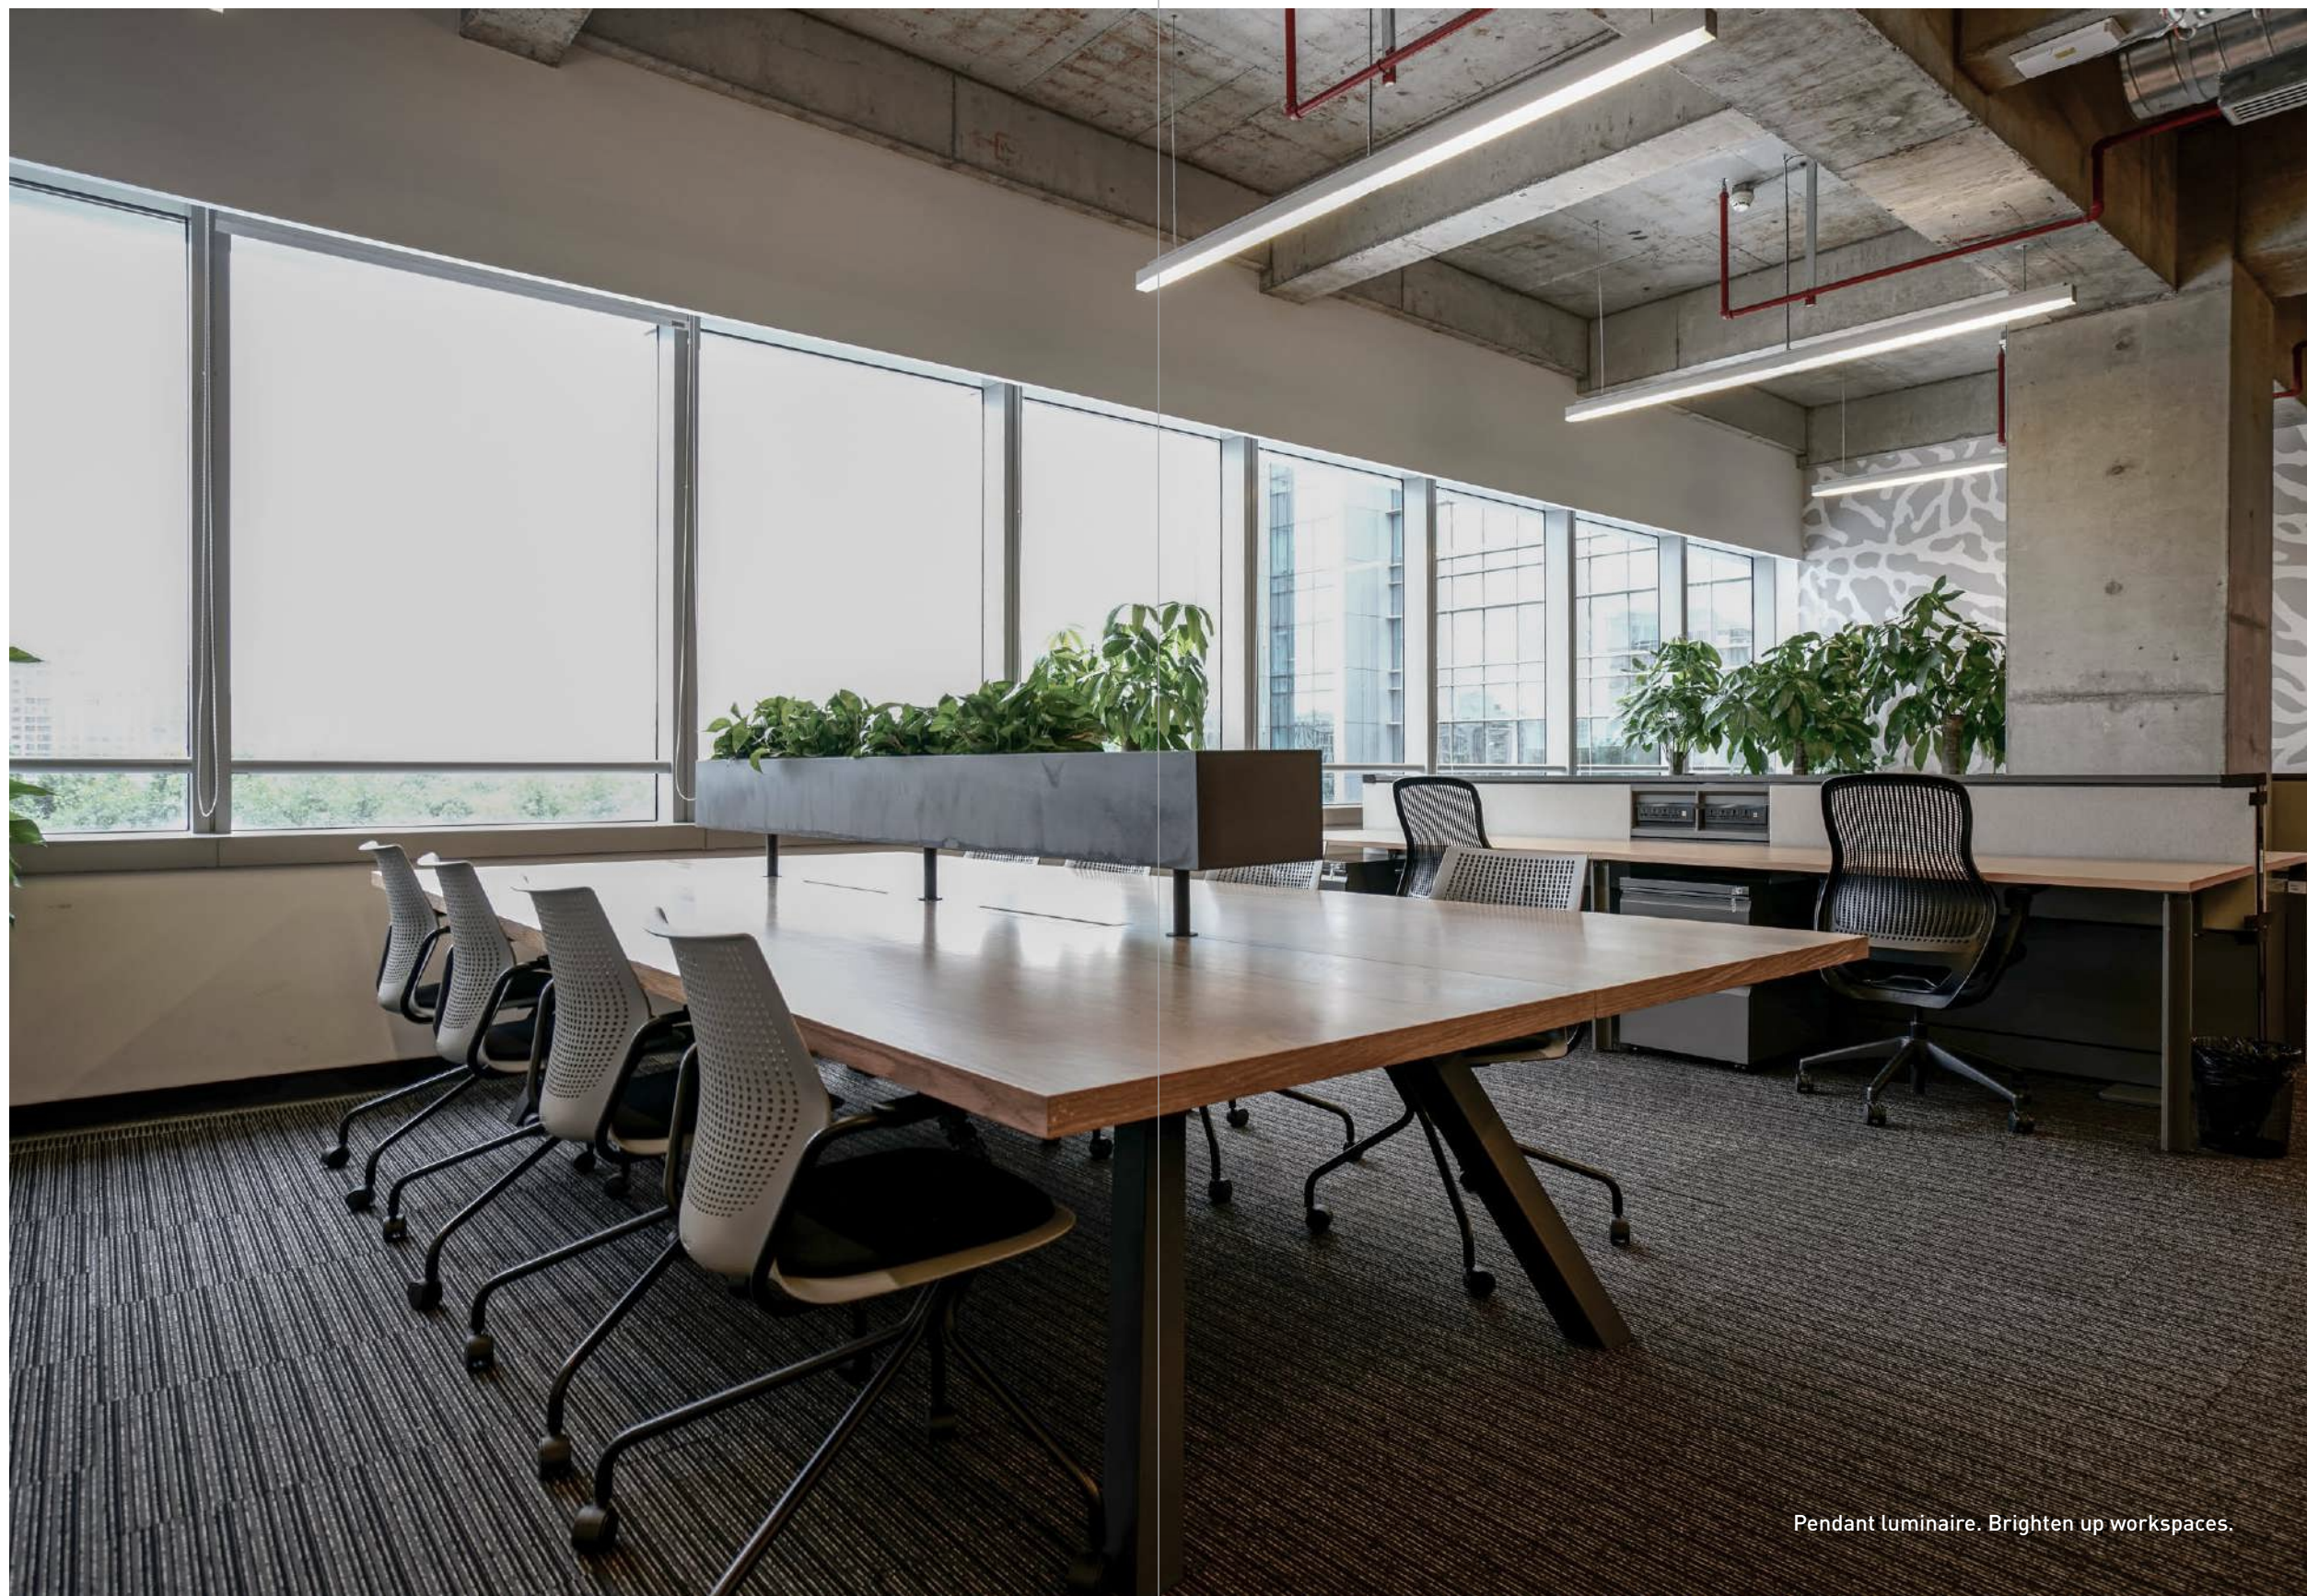

Pendant luminaire. Brighten up workspaces.






Recessed luminaire. Lightens up waiting areas.




The art, science  
and poetics of light




Recessed luminaries. Flexible combinations and applications.

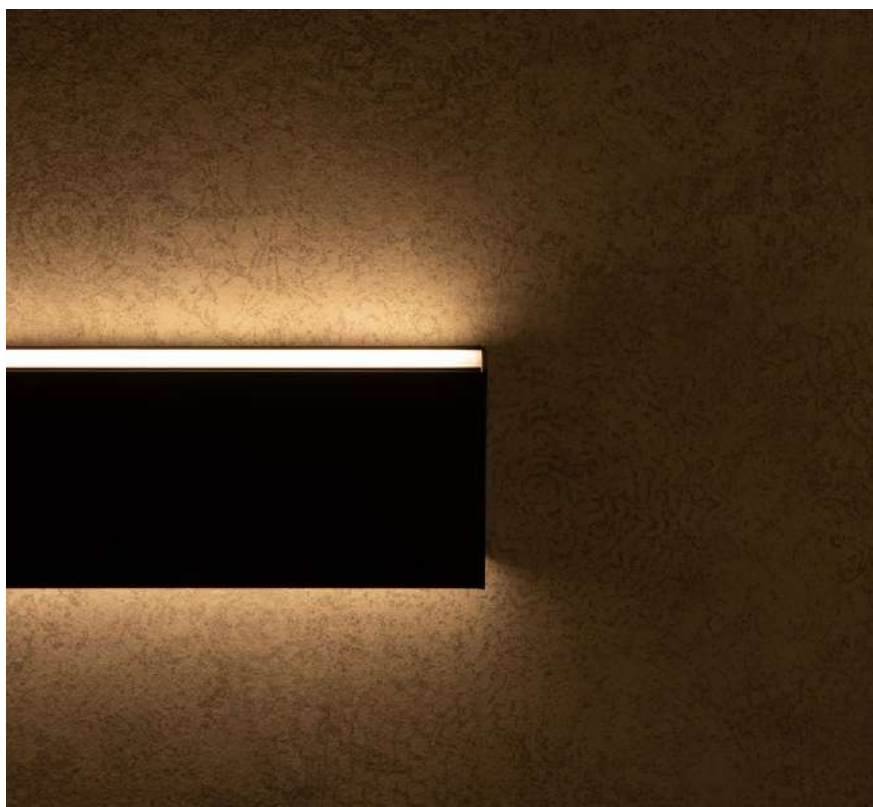



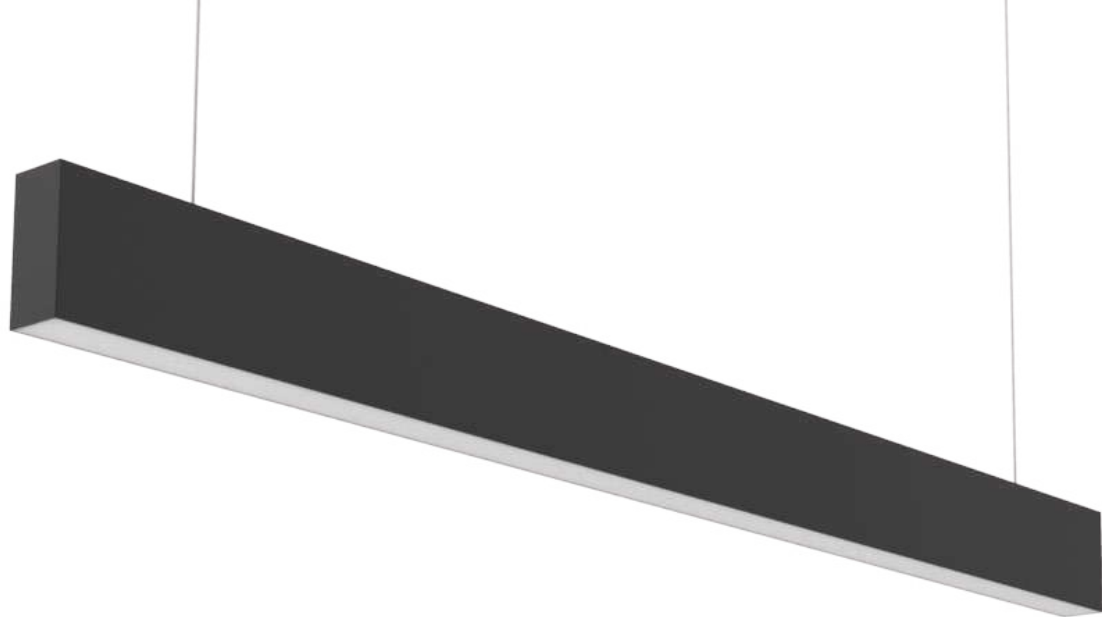


The details are not the details.  
They make the design.

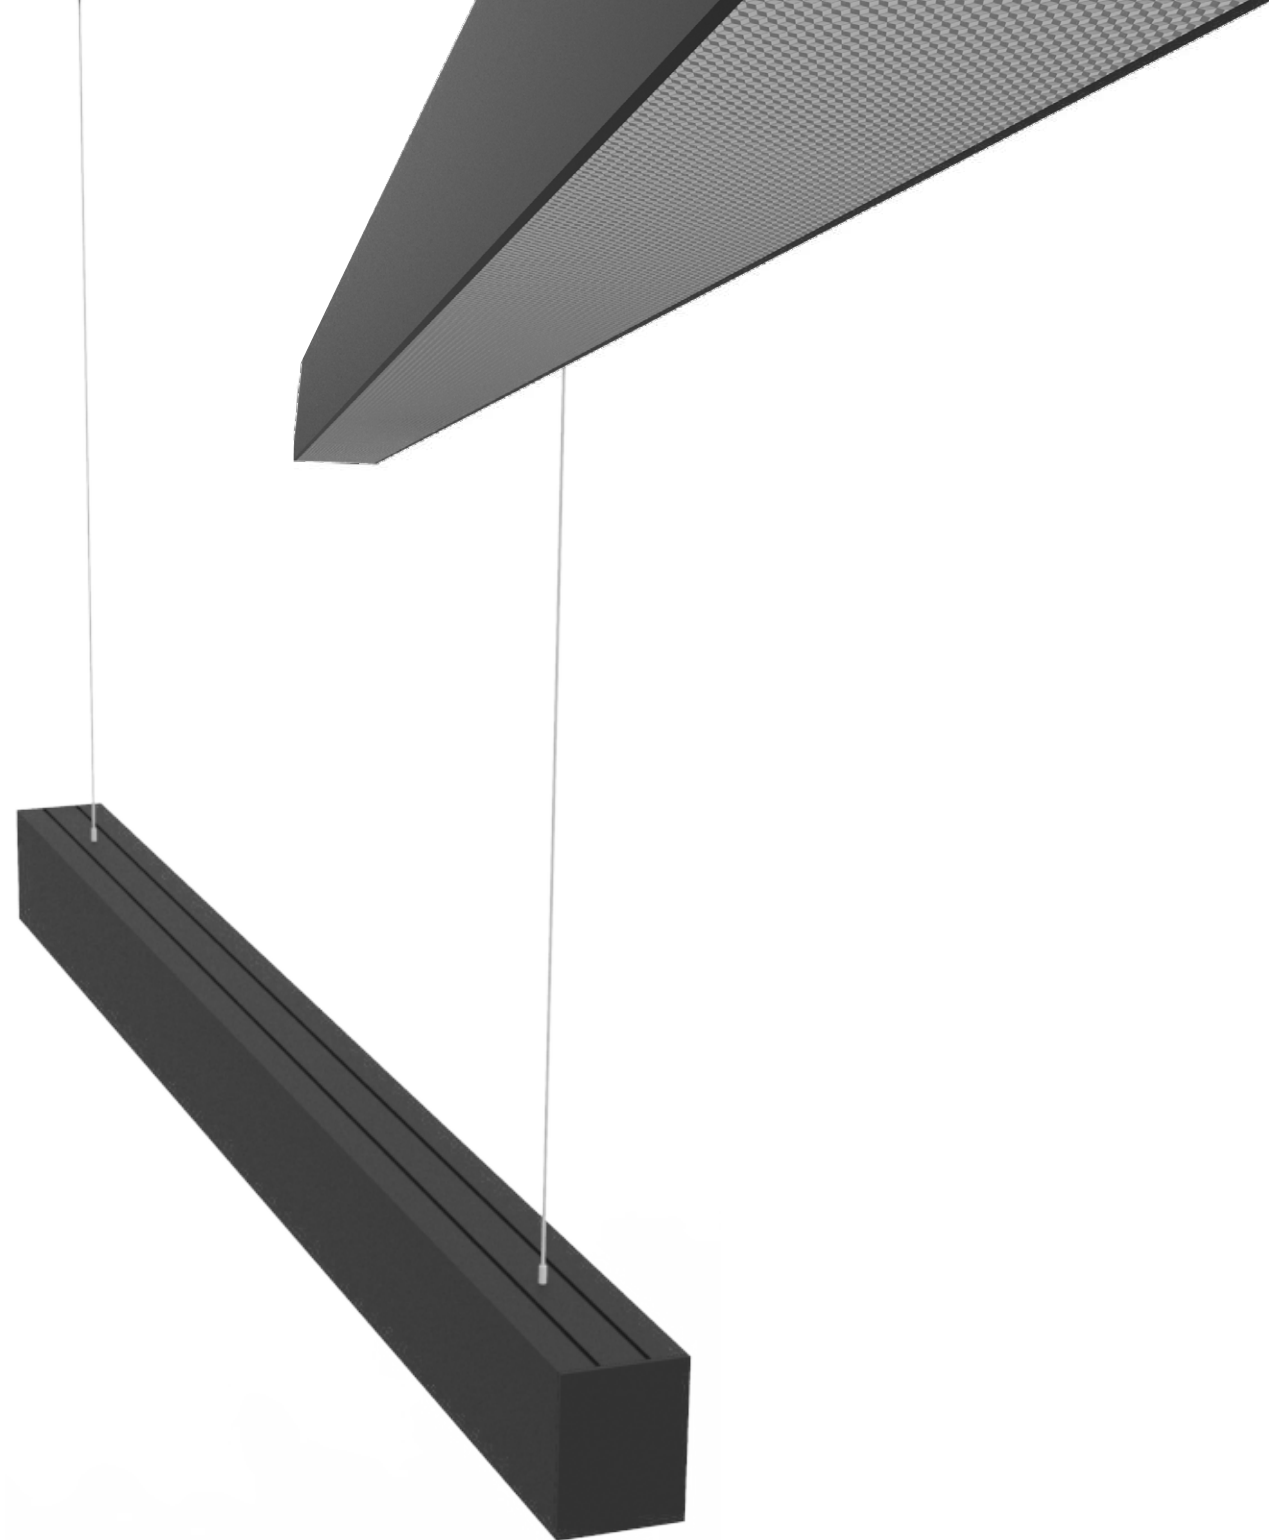



# Linear 40 family

Linear Luminaries  
with a width of 40 mm



Linear 40 **Recessed**  
*without Trim*

Linear 46 **Recessed**  
*with Trim*

Linear 40 **Ceiling**

Linear 40 **Pendant**  
*Direct*

Linear 40 **Pendant**  
*Direct-Indirect*

Linear 40 **Wall**  
*Direct*


Linear 40 **Wall**  
*Direct-Indirect*




# Linear 40

# Linear 40


▸ Linear 46



PENDANT



RECESSED




RECESSED

## PENDANT

Luminaire suspended from the ceiling with a transparent wire.

### DIRECT

Downward light distribution provides uniform lighting.



**Product Code**  
PM-40-D

**Luminaire Type**  
Pendant

**Dimension W x H x L\***  
40x75x1130 mm

**Fixing System**  
1500mm long steel wires with height adjustment system

**Couplers**  
90° Ceiling to ceiling, 90° Ceiling to Wall, T shape, 120° Y shape, X shape, 135° Angle

**Light Distribution**  
Direct

**HE (High Efficiency)**  
23W (System Wattage)


**HO (High Output)**  
27W (System Wattage)

**HE Luminous Flux**  
2047 lm at Luminaire level

**HO Luminous Flux**  
2295 lm at Luminaire level

### DIRECT-INDIRECT

Provides light upward and downward. Can bring a softer ambient glow.



**Product Code**  
PM-40-DI

**Luminaire Type**  
Pendant

**Dimension W x H x L\***  
40x90x1130 mm

**Fixing System**  
1500mm long steel wires with height adjustment system

**Couplers**  
90° Ceiling to ceiling, 90° Ceiling to Wall, T shape, 120° Y shape, X shape, 135° Angle

**Light Distribution**  
Direct-Indirect

**HE (High Efficiency)**  
23W /11w (System Wattage)

**HO (High Output)**  
27W /13w (System Wattage)

**HE Luminous Flux**  
3026 lm at Luminaire level


**HO Luminous Flux**  
3400 lm. at Luminaire level

## RECESSED

Luminaire directly installed into a hollow opening in a ceiling.

### DIRECT

Downward light distribution provides uniform lighting.



**Product Code**  
RM-40-D

**Luminaire Type**  
Recessed - Trimless

**Dimension W x H x L\***  
40x75x1130 mm

**Fixing System**  
Recessed Mounting Brackets

**Couplers**  
90° Ceiling to ceiling, 90° Ceiling to Wall, T shape, 120° Y shape, X shape, 135° Angle

**Light Distribution**  
Direct

**HE (High Efficiency)**  
23W (System Wattage)

**HO (High Output)**  
27W (System Wattage)

**HE Luminous Flux**  
2047 lm at Luminaire level


**HO Luminous Flux**  
2295 lm at Luminaire level

## RECESSED

Luminaire directly installed into a hollow opening in a ceiling.

### DIRECT WITH TRIM

Downward light distribution provides uniform lighting.



**Product Code**  
RMWT-46-D

**Luminaire Type**  
Recessed

**Dimension W x H x L\***  
46x75x1130 mm

**Fixing System**  
Recessed Mounting Brackets

**Couplers**  
90° Ceiling to ceiling, 90° Ceiling to Wall, T shape, 120° Y shape, X shape, 135° Angle

**Light Distribution**  
Direct

**HE (High Efficiency)**  
23W (System Wattage)

**HO (High Output)**  
27W (System Wattage)

**HE Luminous Flux**  
2047 lm at Luminaire level

**HO Luminous Flux**  
2295 lm at Luminaire level

All Linear 40 carry the following specifications

GENERAL	<b>Body Construction</b>	Highest grade extruded aluminum Aluminum profile single max. length available in 3380mm
	<b>Surface Finishes</b>	Natural anodized finish   Texture White   Texture Black   Texture Grey   Any Other RAL color possible on Request (Any Contrast color also possible)
	<b>End Cap</b>	Screw less End cap made of Aluminum
	<b>LED Batten</b>	Made of aluminum extrusion in white powder coated, is fixed in with Snap-in technique
	<b>IP Rating</b>	40
LED	<b>Light Source CCT</b>	LED 3000K   4000K   5700K   TW (Tunable White) 2700-6500K
	<b>CRI</b>	80+, 90+ (Available on request)
	<b>UGR</b>	<22 with Opal Diffuser, <b>&lt;19 with Micro-Prismatic Diffuser</b>
	<b>MacAdam Step</b>	3
	<b>Power Factor</b>	0.94 Push-in Wago terminals for quick and easy wiring between two led modules Quick coupling BJB Connector to simplify connections between the subsequent modules.
	<b>Diffuser</b>	Satin finished PC Opal Diffuser or <b>Micro-Prismatic diffuser</b> , is fixed with Snap-in technique, Diffuser single max. length available in 3380mm
	<b>Driver</b>	Non-Dimmable DALI Dimmable 0-10V Analogue Dimmable Bluetooth 4.0 CASAMBI remote control through App

All Linear 40 are available in the following colours



\*The length mentioned here is only for a single unit but can be changed as per your preference.