


2

Linear

Pure blend of
light and form.
Desired choice for
adaptable, modest
lighting solutions.

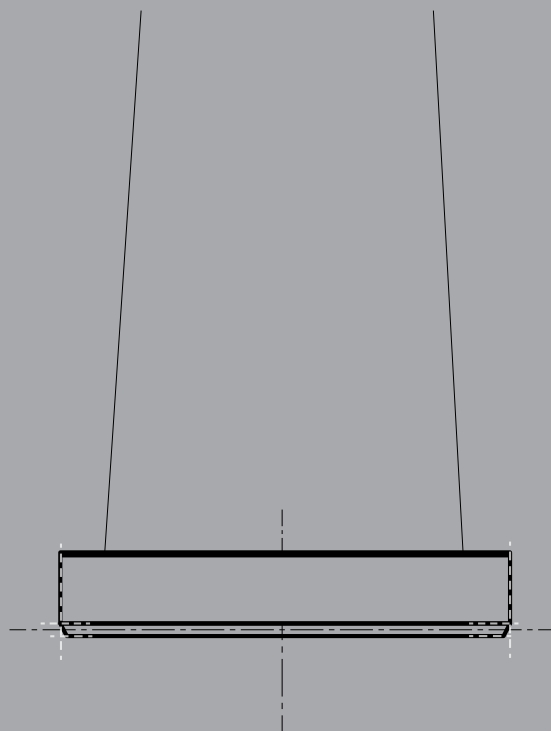


What is Linear

LED profile for creating continuous line systems. Easily integrated into any architecture.

Produces ideal ambient lighting for any space.



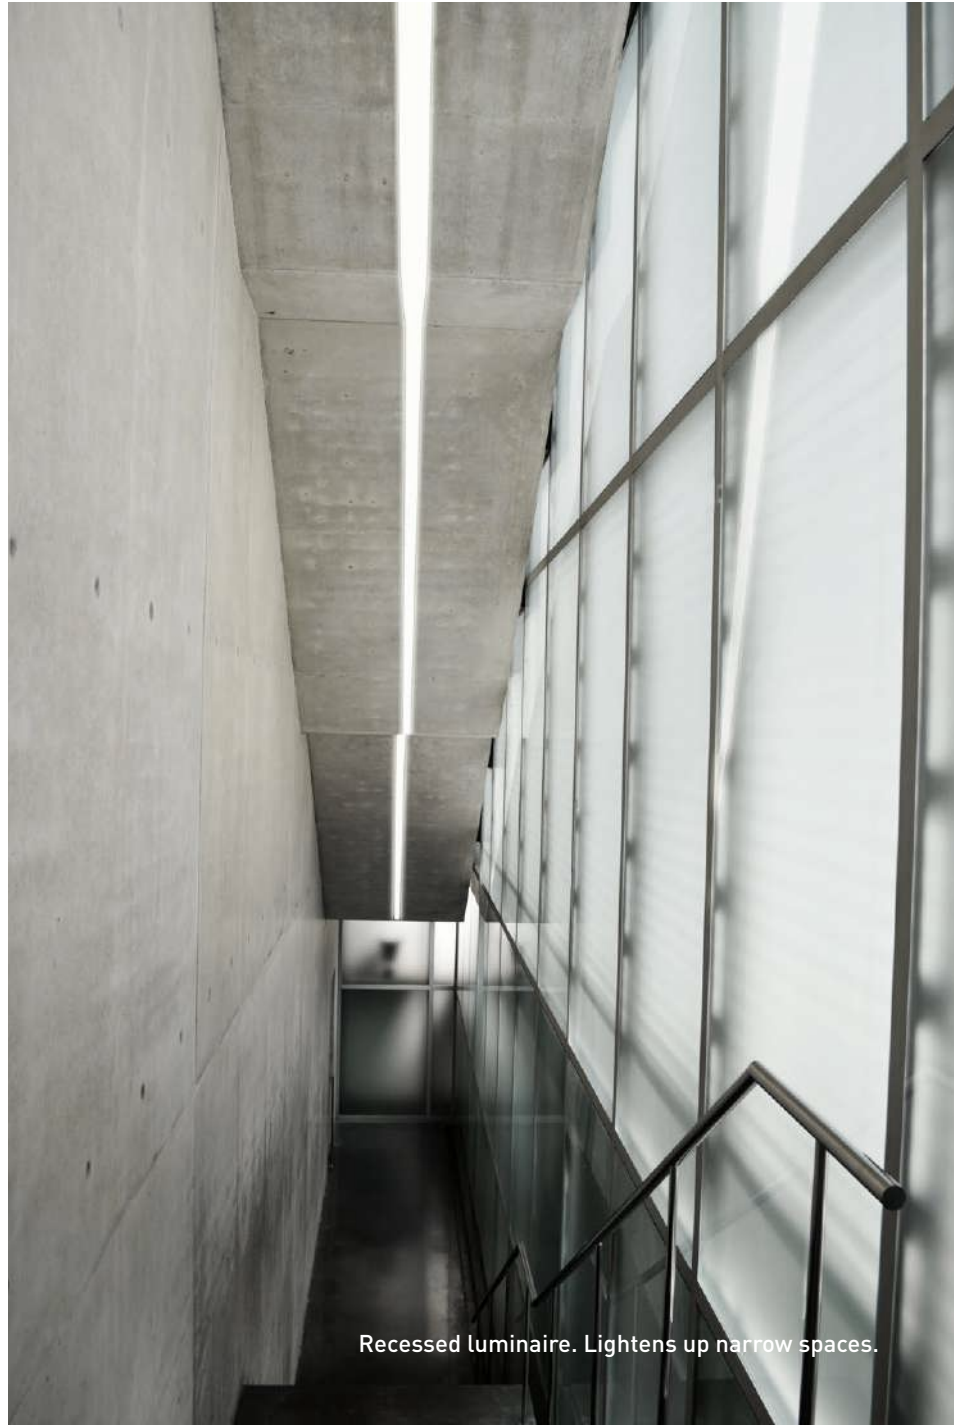


Recessed luminaire. Lightens up narrow spaces.



Linear
with trim
(applicable
on 46 and 80)

Uniform
lighting
solution.

Even illumination creates
**minimal distraction
shadows** near joints
or couplers.

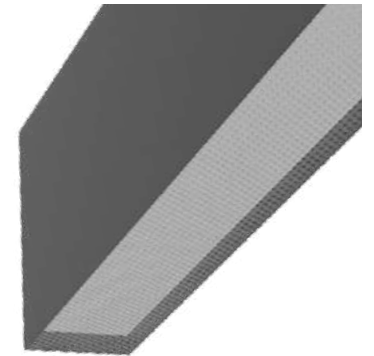

Stylishly
adaptable
design.

Easily customisable.
Serves **multiple**
interior design needs.




Aesthetic,
functional
luminaries.


Aesthetic. Elegant,
optimal design, needing
no additional heat sink.
Outlasts traditional
fluorescent tubes.



Recessed luminaries. Lighten up narrow spaces.

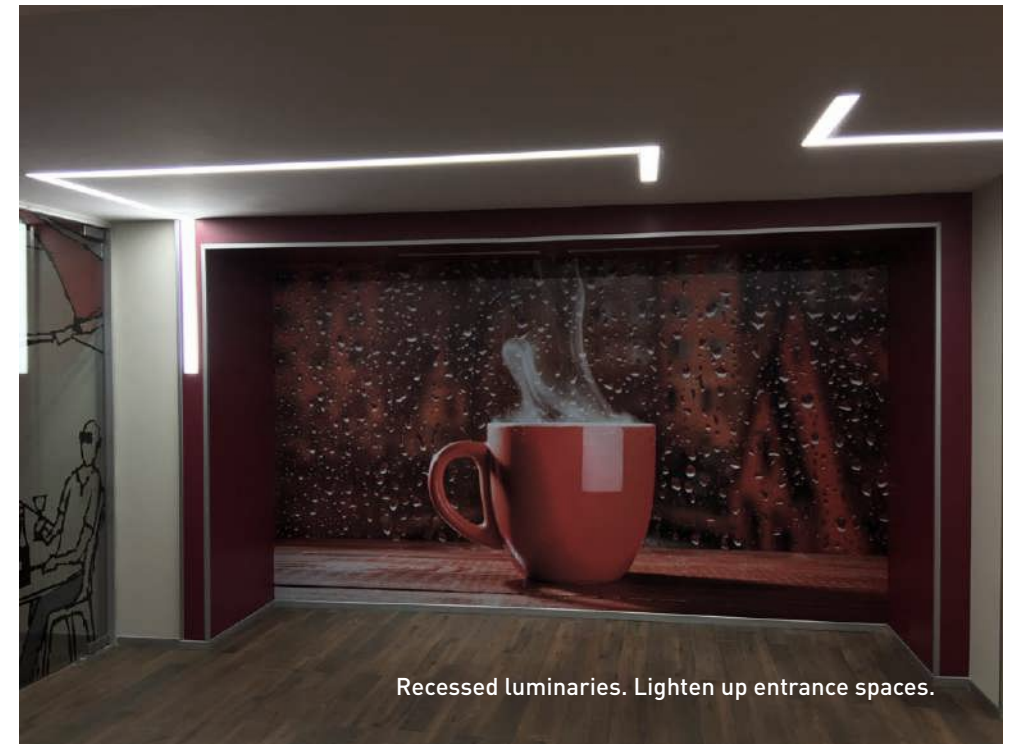

Recessed luminaries. Lighten up entrance spaces.

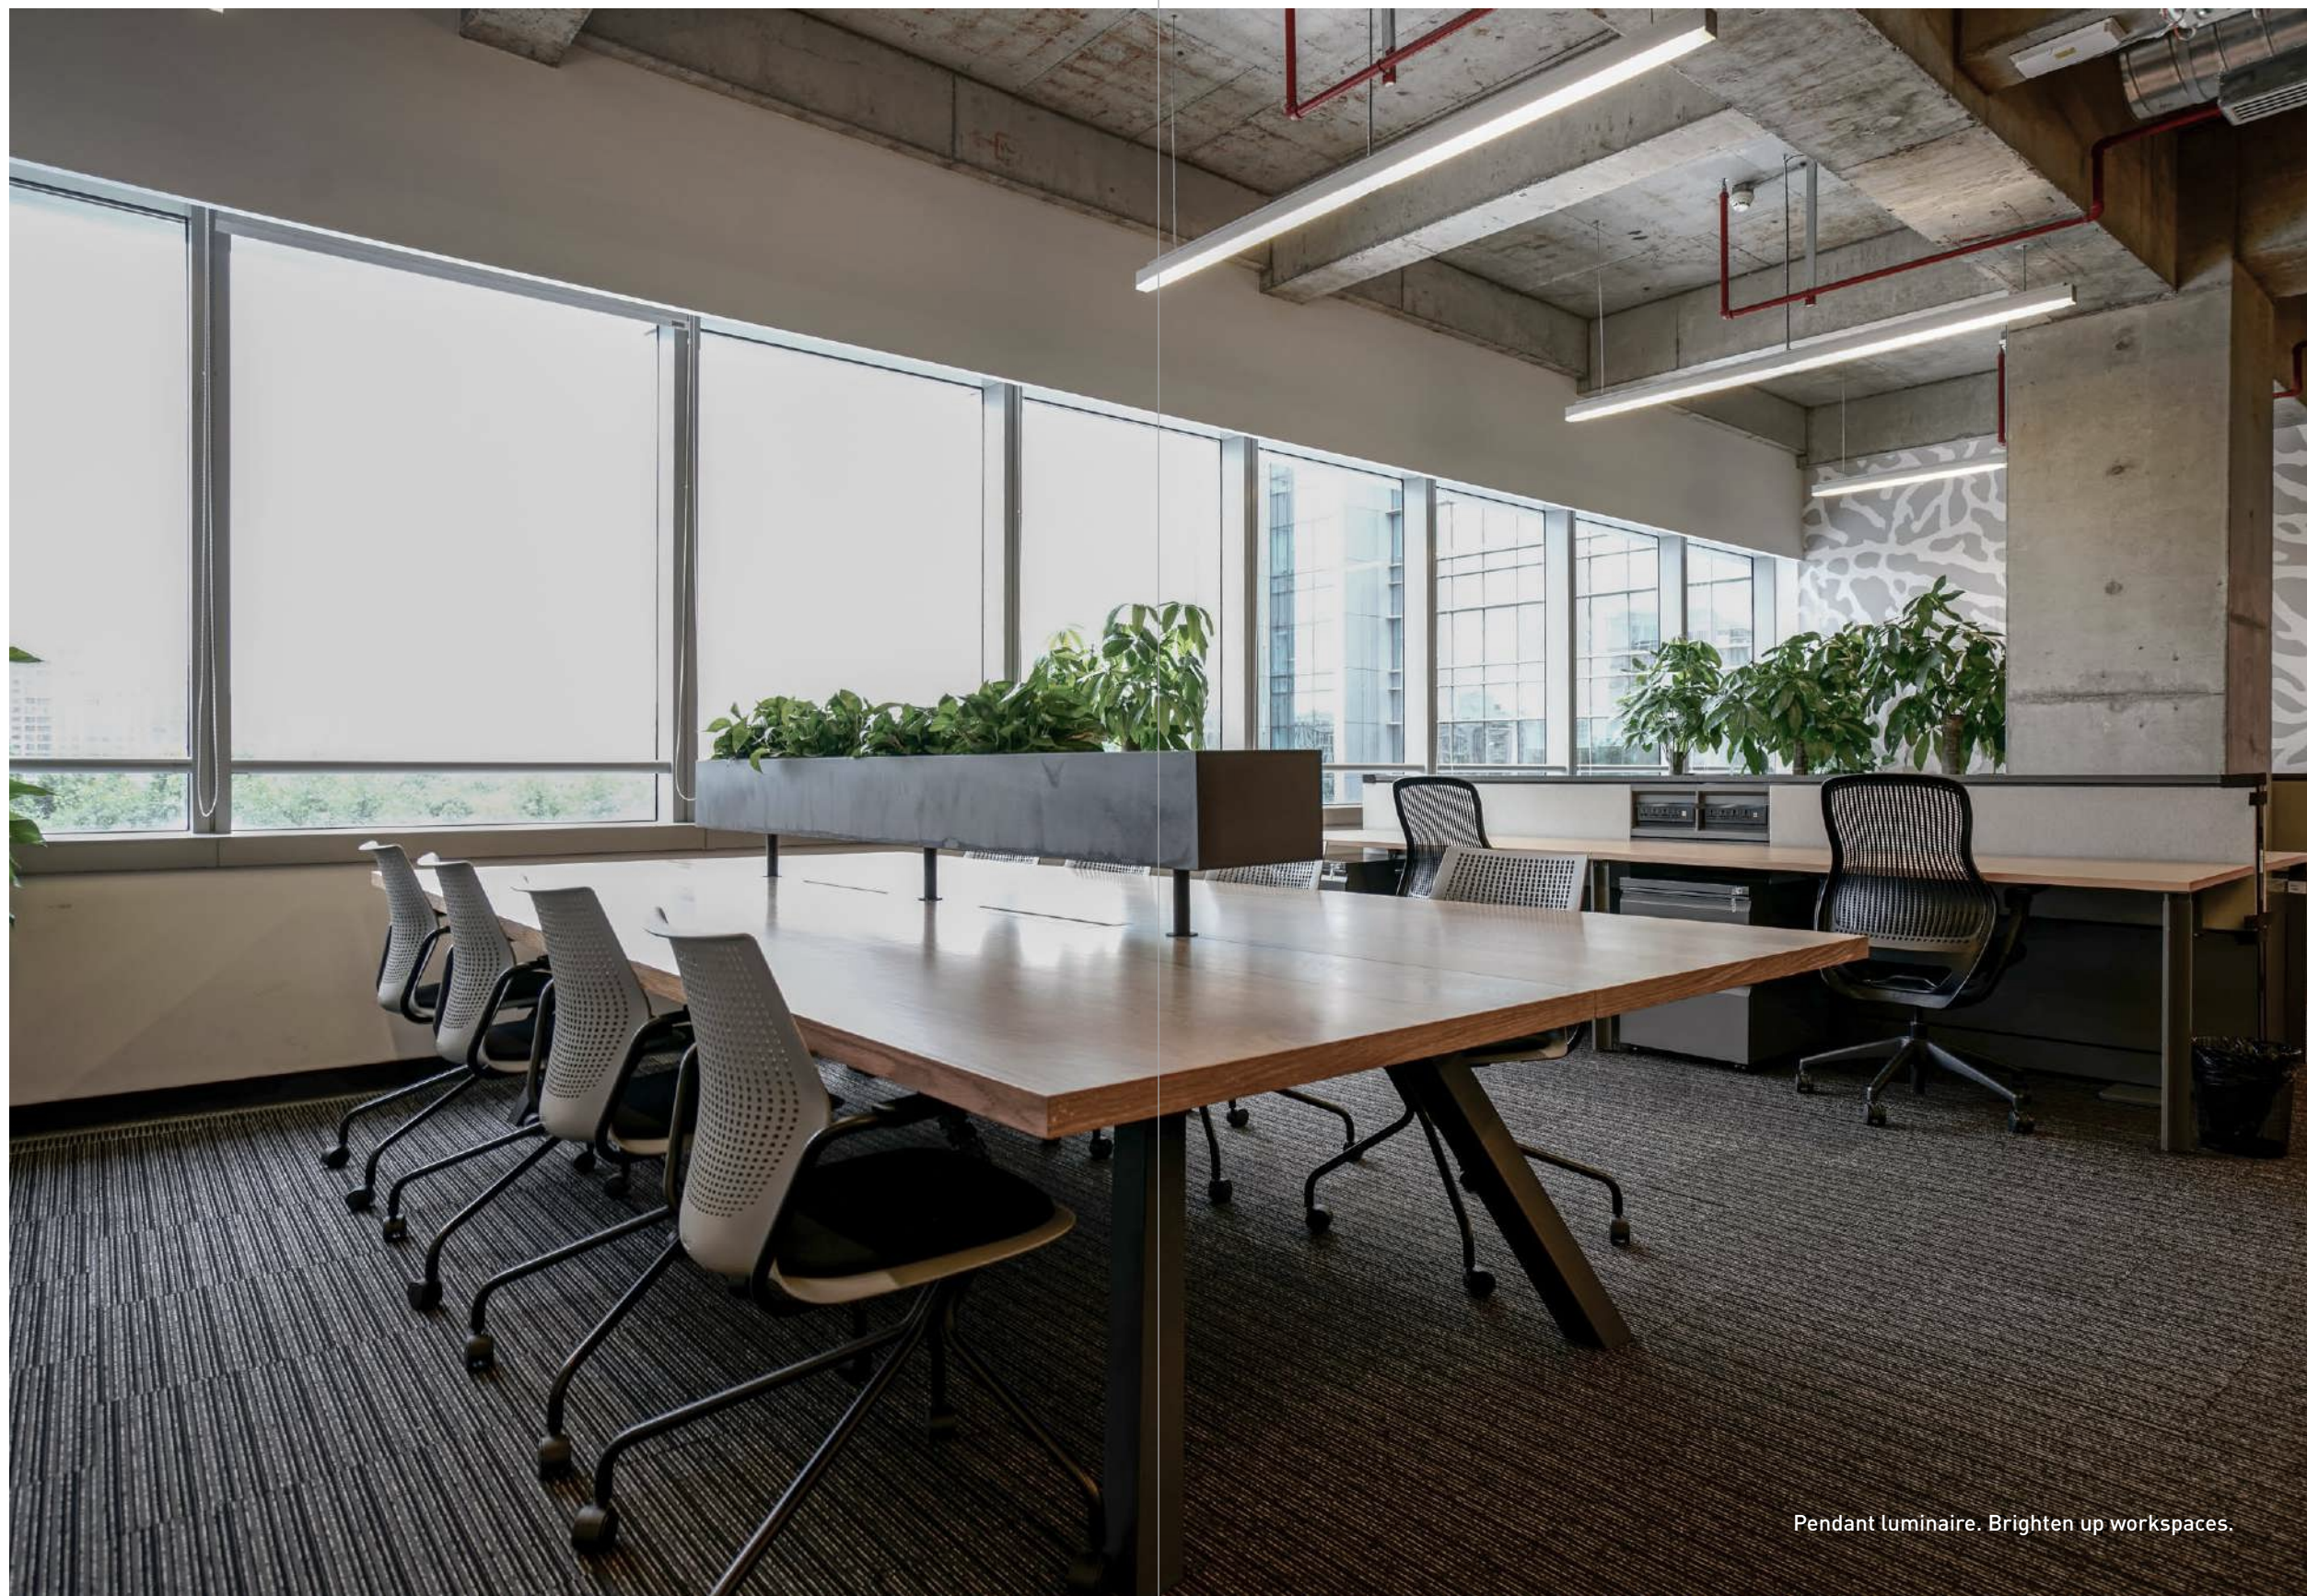

Pendant luminaire. Brighten up workspaces.





Recessed luminaire. Lightens up waiting areas.

The art, science
and poetics of light




Recessed luminaries. Flexible combinations and applications.

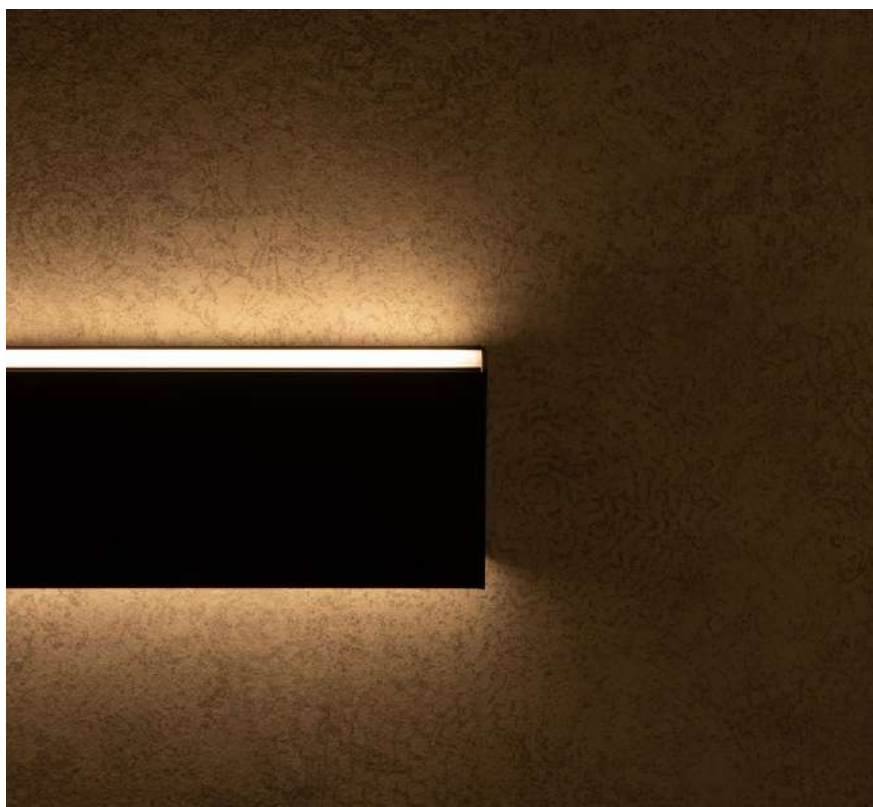

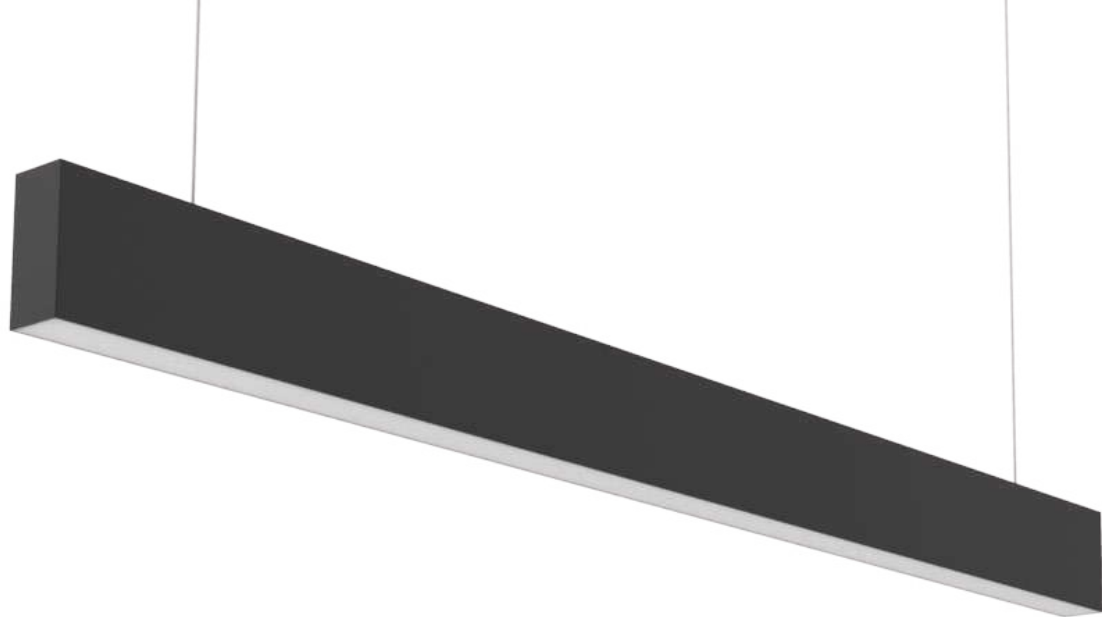


The details are not the details.
They make the design.

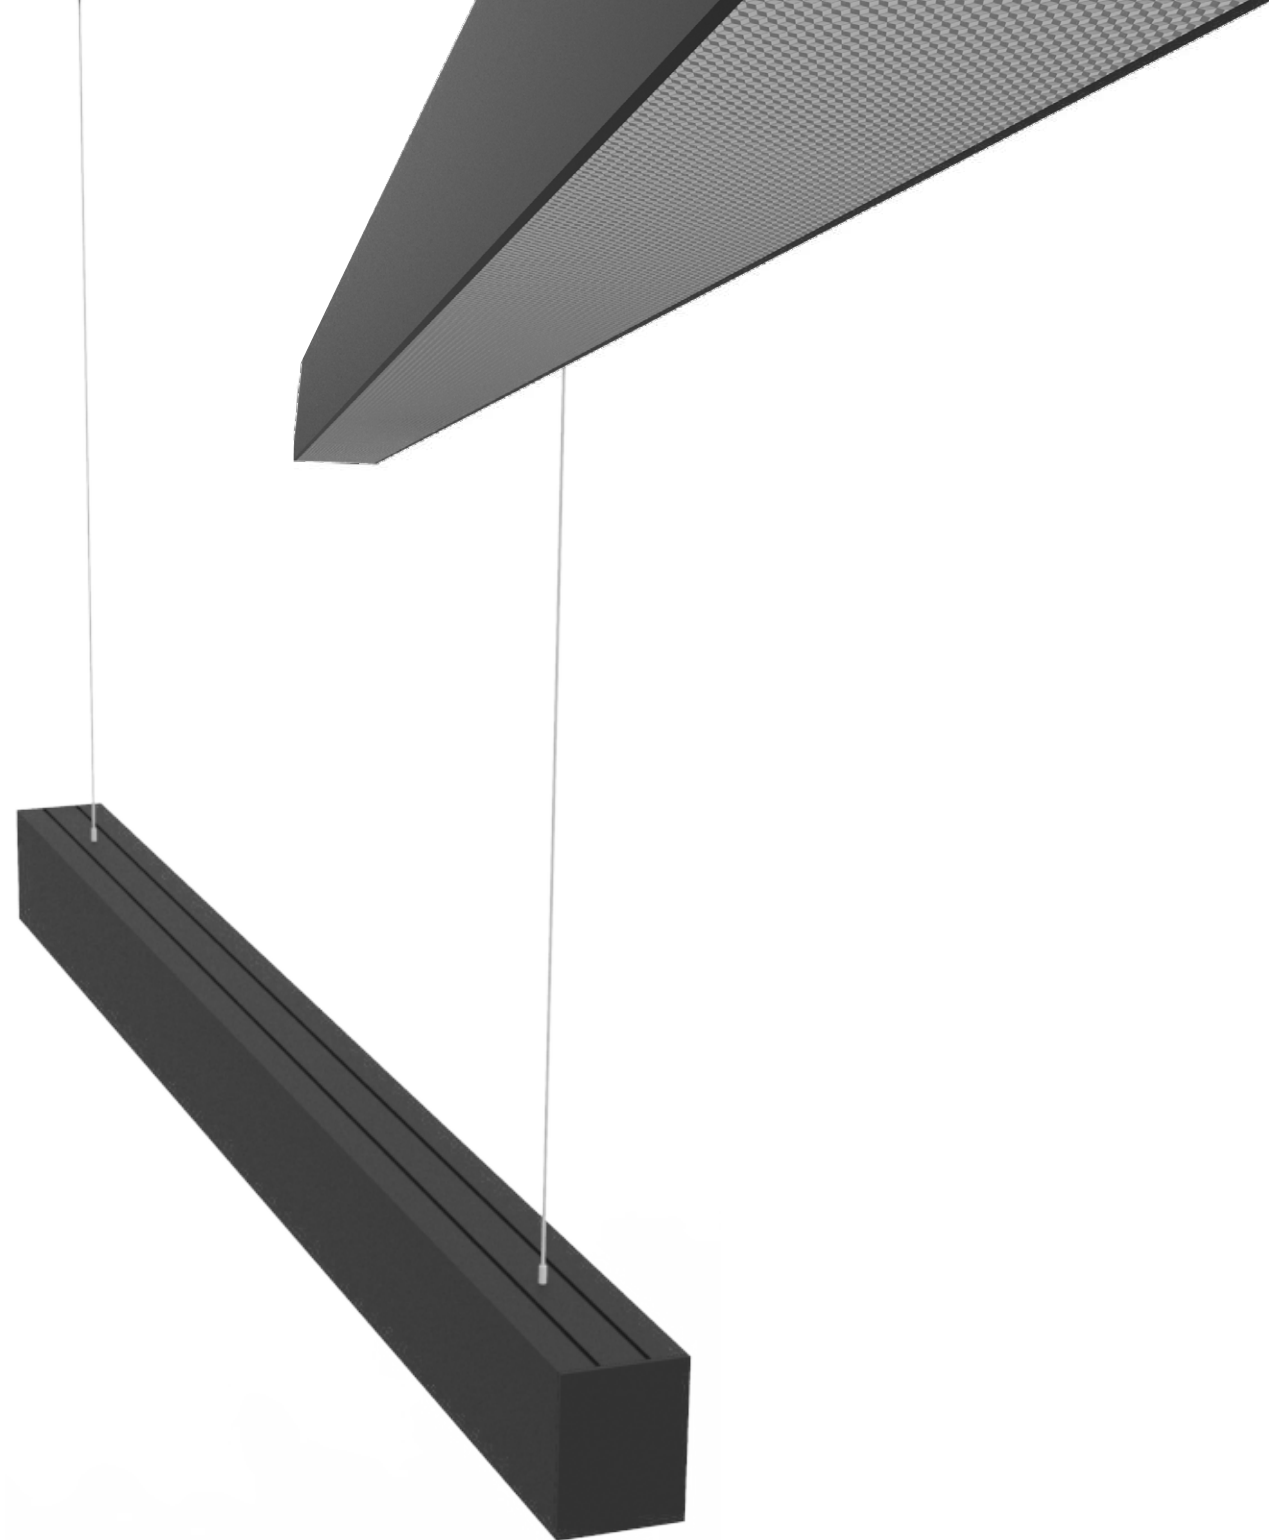

Linear 40 family

Linear Luminaries
with a width of 40 mm



Linear 40 **Recessed**
without Trim

Linear 46 **Recessed**
with Trim

Linear 40 **Ceiling**


Linear 40 **Pendant**
Direct

Linear 40 **Pendant**
Direct-Indirect

Linear 40 **Wall**
Direct

Linear 40 **Wall**
Direct-Indirect

Linear 40




WALL

Luminaire mounted on the wall.

DIRECT

Downward light distribution provides uniform lighting.



Product Code
WM-40-D

Luminaire Type
Wall Mounted

Dimension W x H x L*
40x75x1130 mm

Fixing System
Wall Mounted with Screw

Couplers
90° Wall to Wall

Light Distribution
Direct

HE (High Efficiency)
23W (System Wattage)


HO (High Output)
27W (System Wattage)

HE Luminous Flux
2047 lm at Luminaire level

HO Luminous Flux
2295 lm at Luminaire level

DIRECT-INDIRECT

Provides light upward and downward. Can bring a softer ambient glow.



Product Code
WM-40-DI

Luminaire Type
Wall Mounted

Dimension W x H x L*
40x90x1130 mm

Fixing System
Wall Mounted with Screw

Couplers
90° Wall to Wall


Light Distribution
Direct-Indirect

HE (High Efficiency)
23W /11w (System Wattage)

HO (High Output)
27W /13w (System Wattage)

HE Luminous Flux
3026 lm at Luminaire level

HO Luminous Flux
3400 lm. at Luminaire level




CEILING

CEILING

Flush-mount luminaries attached to the ceiling.

DIRECT

Downward light distribution provides uniform lighting.



Product Code
CM-40-D

Luminaire Type
Ceiling Mounted

Dimension W x H x L*
40x75x1130 mm

Fixing System
Ceiling Mounted with Screw

Couplers
90° Ceiling to ceiling, 90° Ceiling to Wall, T shape, 120° Y shape, X shape, 135° Angle

Light Distribution
Direct

HE (High Efficiency)
23W (System Wattage)

HO (High Output)
27W (System Wattage)

HE Luminous Flux
2047 lm at Luminaire level

HO Luminous Flux
2295 lm at Luminaire level

All Linear 40 carry the following specifications

GENERAL	Body Construction	Highest grade extruded aluminum Aluminum profile single max. length available in 3380mm
	Surface Finishes	Natural anodized finish Texture White Texture Black Texture Grey Any Other RAL color possible on Request (Any Contrast color also possible)
	End Cap	Screw less End cap made of Aluminum
	LED Batten	Made of aluminum extrusion in white powder coated, is fixed in with Snap-in technique
	IP Rating	40

LED	Light Source CCT	LED 3000K 4000K 5700K TW (Tunable White) 2700-6500K
	CRI	80+, 90+ (Available on request)
	UGR	<22 with Opal Diffuser, <19 with Micro-Prismatic Diffuser
	MacAdam Step	3

Power Factor 0.94
Push-in Wago terminals for quick and easy wiring between two led modules
Quick coupling BJB Connector to simplify connections between the subsequent modules.

Diffuser	Satin finished PC Opal Diffuser or Micro-Prismatic diffuser , is fixed with Snap-in technique, Diffuser single max. length available in 3380mm
-----------------	---

Driver	Non-Dimmable DALI Dimmable 0-10V Analogue Dimmable Bluetooth 4.0 CASAMBI remote control through App
---------------	---

All Linear 40 are available in the following colours



*The length mentioned here is only for a single unit but can be changed as per your preference.