


7

## Hexedge Full (F) & Hexedge Hollow (H)

Offers adaptable lighting solutions. Harmonizes seamlessly with the architecture and singular interior design.

---

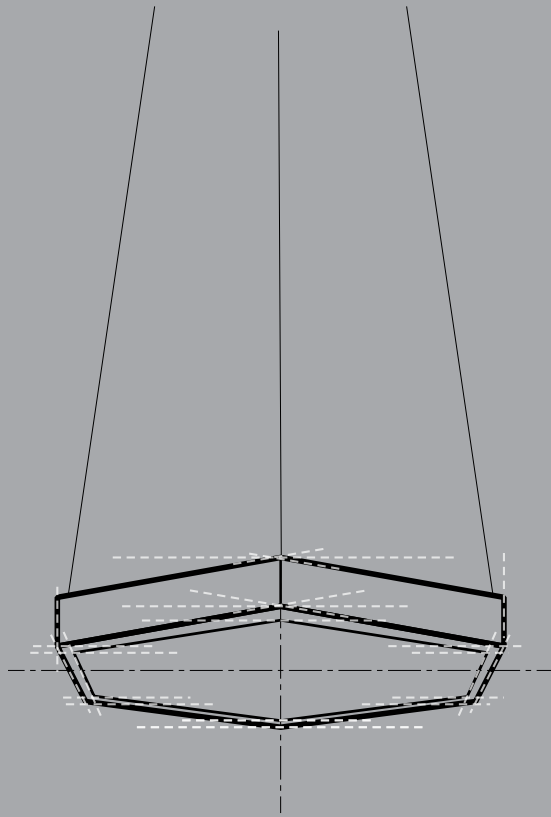



A journey of investigation  
and exploration




# Hexedge Hollow (H)

Hexedge H can be mounted in two ways

## RECESSED

Luminaire directly installed into a hollow opening in a ceiling.



**Product Code**  
HRH40-D-600 | HRH40-D-900

**Luminaire Type**  
Recessed

**Dimension  $\Phi$  x H x W**  
600x75x40 mm | 900x75x40 mm

**Fixing System**  
Mounting Bracket for Recessed


**Light Distribution**  
Direct

**System Wattage**  
45W | 75W

**Luminous Flux**  
3150 lm | 5250 lm

## CEILING

Flush-mount luminaires attached to the ceiling.



**Product Code**  
HCH40-D-600 | HCH40-D-900

**Luminaire Type**  
Ceiling Mounted

**Dimension  $\Phi$  x H x W**  
600x75x40 mm | 900x75x40 mm

**Fixing System**  
Ceiling Mounted with Screw


**Light Distribution**  
Direct

**System Wattage**  
45W | 75W

**Luminous Flux**  
3150 lm | 5250 lm

## PENDANT

Luminaire suspended from the ceiling with a transparent wire.



### Direct

**Product Code**  
HPH40-D-600 | HPH40-D-900

**Luminaire Type**  
Pendant

**Dimension  $\Phi$  x H x W**  
600x75x40 mm | 900x75x40 mm

**Fixing System**  
1500 mm long steel wires with height adjustment system

**Light Distribution**  
Direct

**System Wattage**  
45W | 75W

**Luminous Flux**  
3150 lm | 5250 lm

### Direct-Indirect

**Product Code**  
HPH40-D/I-600 | HPH40-D/I-900

**Luminaire Type**  
Pendant

**Dimension  $\Phi$  x H x W**  
600x90x40 mm | 900x90x40 mm

**Fixing System**  
1500 mm long steel wires with height adjustment system


**Light Distribution**  
Direct-Indirect

**System Wattage**  
75W | 115 W

**Luminous Flux**  
5250 lm | 8050 lm

## WALL

Luminaire mounted on the wall.



**Product Code**  
HWH40-D-600 | HWH40-D-900

**Luminaire Type**  
Wall Mounted

**Dimension  $\Phi$  x H x W**  
600x75x40 mm | 900x75x40 mm

**Fixing System**  
Wall Mounted with Screw

**Light Distribution**  
Direct

**System Wattage**  
45W | 75W

**Luminous Flux**  
3150 lm | 5250 lm

All Hexedge H carry the following specifications

GENERAL	<b>Body Construction</b>	Highest grade extruded aluminum
	<b>Surface Finishes</b>	Texture White Texture Black Texture Grey Any Other RAL color possible on Request
	<b>IP Rating</b>	40

LED	<b>Light Source</b>	LED
	<b>CCT</b>	3000K   4000K   5700K   TW (Tunable White) 2700-6500K
	<b>CRI</b>	80+, 90+ (Available on request)
	<b>MacAdam Step</b>	3

<b>Power Factor</b>	0.94
---------------------	------

<b>Diffuser</b>	Satin finished Opal Diffuser
-----------------	------------------------------

<b>Driver</b>	Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App
---------------	--

All Hexedge H are available in the following colours

