



2

ring0 Slim Bunch




Exceptional, artistic lighting that solves a range of illumination tasks and interior looks with precise sophistication.

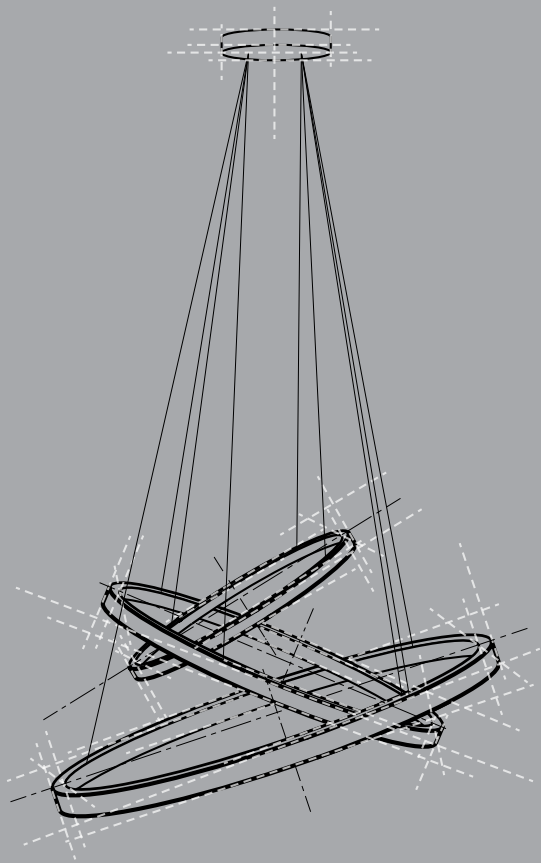

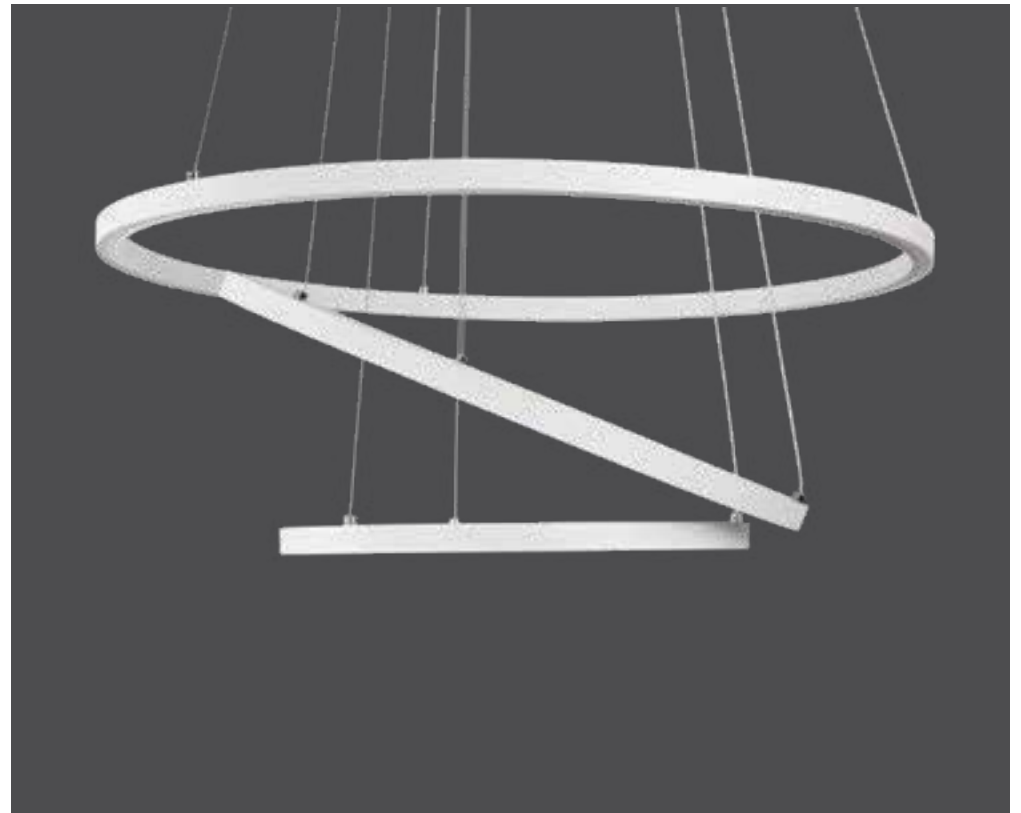

BUNCH STYLES


ring0 Slim Bunch offers a variety of styles for how the bunches can be created. These are some signature styles. The bunches have individual string systems and can be customised in various other styles.

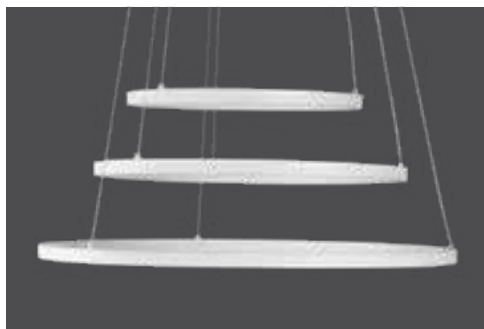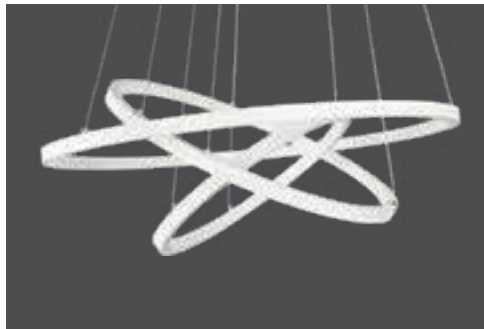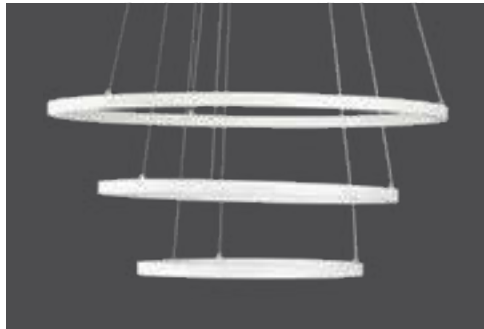

ring0 Slim Bunch

DIRECT

Downward light distribution provides uniform lighting.



Direct 1200-1000-800 |
1000-800-600 | 800-600-450

Product Code
RSPB-D-12108 | RSPB-D-1086 | RSPB-D-864

Dimension Φ x H x W
1200-1000-800x25x20 mm
1000-800-600x25x20 mm
800-600-450x25x20 mm


Light Distribution
Direct

System Wattage
170W | 135W | 100W

Luminous Flux
11900 lm | 9450 lm | 7000 lm

DIRECT-INDIRECT

Provides light upward and downward. Can bring a softer ambient glow.



Direct-Indirect 1200-1000-800 |
1000-800-600 | 800-600-450

Product Code
RSPB-DI-12108 | RSPB-DI-1086 | RSPB-DI-864

Dimension Φ x H x W
1200-1000-800x40x20 mm
1000-800-600x40x20 mm
800-600-450x40x20 mm

Light Distribution
Direct-Indirect

System Wattage
220W | 180W | 150W

Luminous Flux
15400 lm | 12600 lm | 10500 lm

All ring0 Slim Bunch carry the following specifications

GENERAL	Luminaire Type	Pendant
	Body Construction	Highest grade extruded aluminum
	Surface Finishes	Texture White Texture Black Texture Grey Any Other RAL color possible on Request
	IP Rating	40
LED	Light Source CCT	LED 3000K 4000K 5700K TW (Tunable White) 2700-6500K
	CRI	80+, 90+ [Available on request]
	MacAdam Step	3
	Power Factor	0.94
	Fixing System	1500 mm long steel wires with height adjustment system
	Diffuser	Satin finished Opal Diffuser
	Driver	Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App

All ring0 Slim Bunch are available in the following colours

