


①

ring0 Slim

Flawless balance of clarity and luxury. The minimal, slim form can be unified into any interior design.




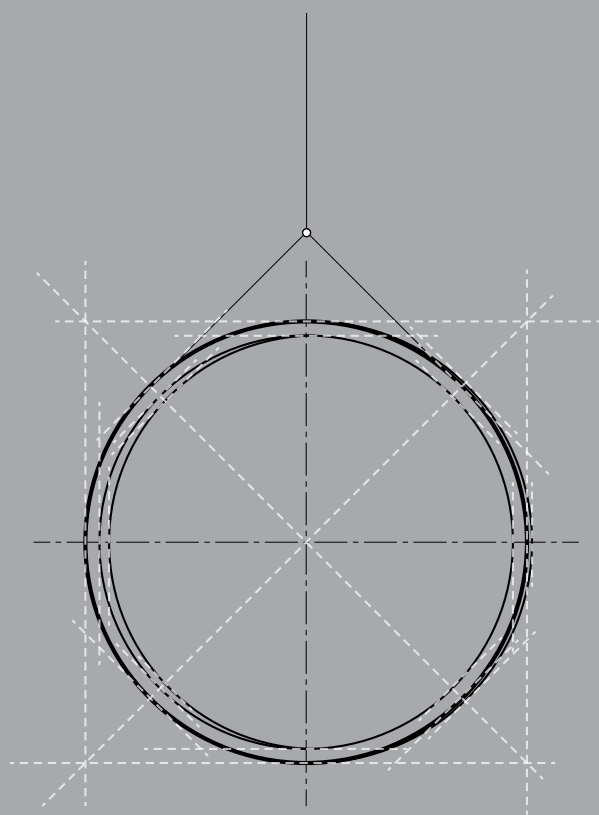

The art, science
and poetics of light





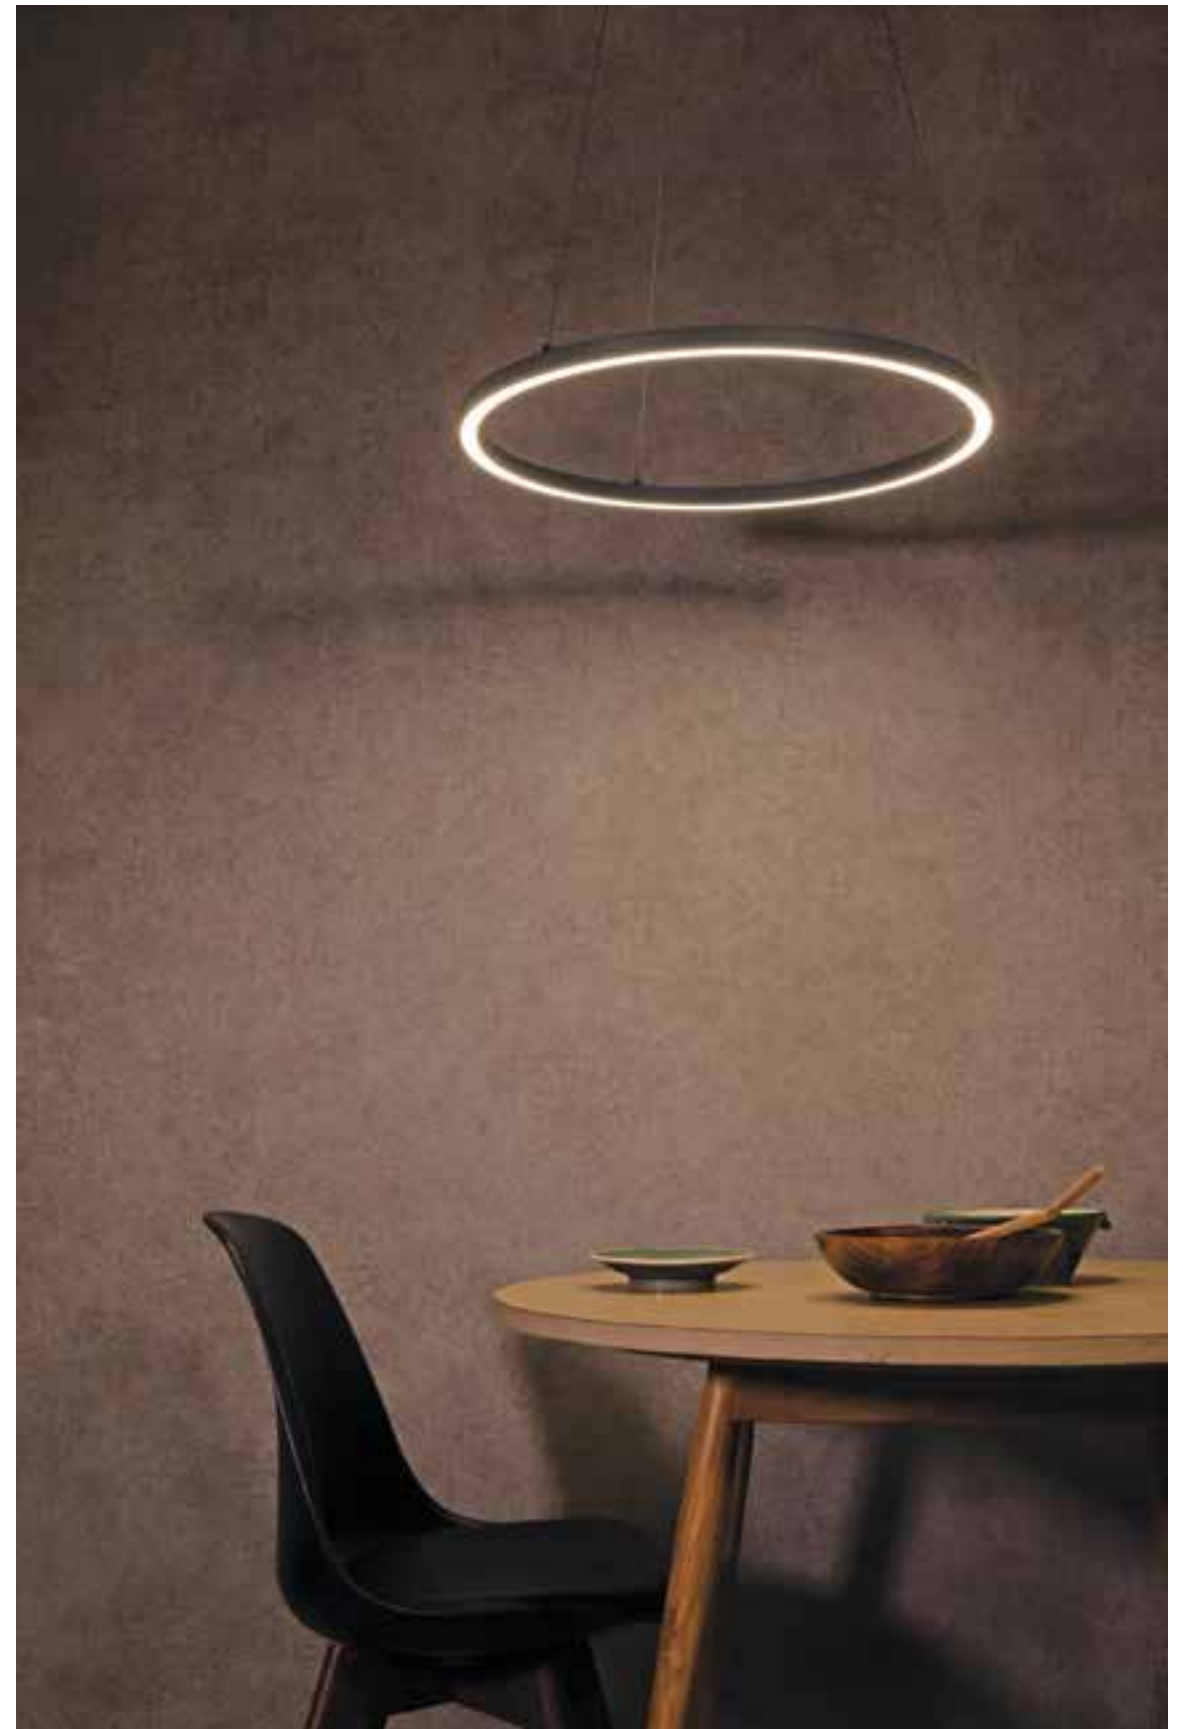




Endless design possibilities, enhanced
by high-performing lighting systems.




RINGO SLIM IS AVAILABLE IN MULTIPLE DIAMETERS


DIRECT

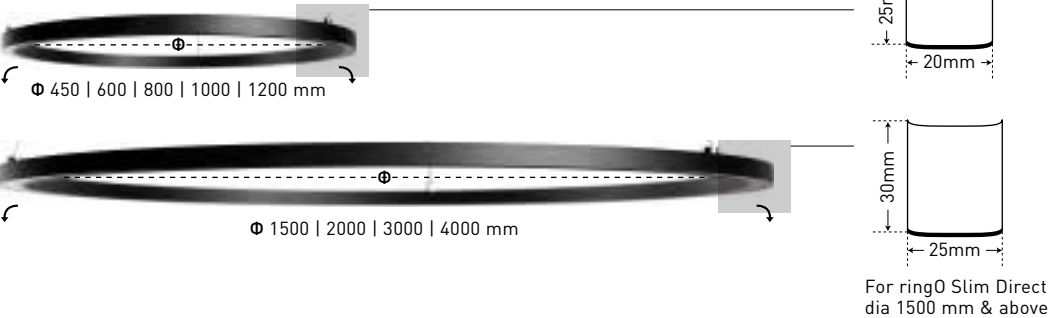

DIRECT-INDIRECT

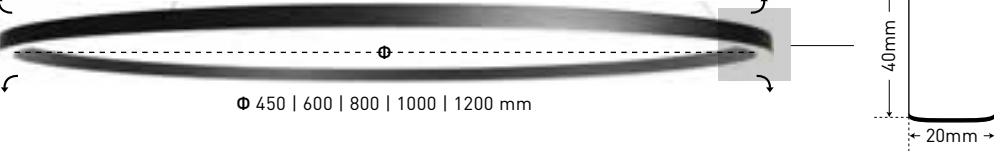

ALL RINGO SLIM CAN BE MOUNTED IN TWO WAYS WITH TWO CANOPY SYSTEMS

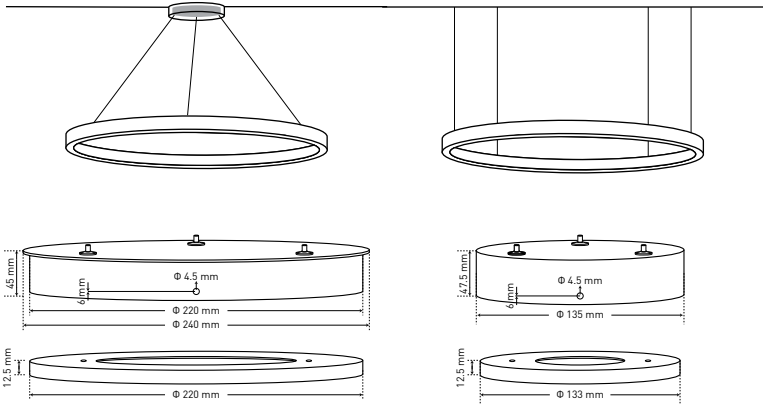

ring0 Slim

DIRECT

Downward light distribution provides uniform lighting.



Direct 450-1200

Product Code
RSP-D-450 | RSP-D-600 | RSP-D-800
RSP-D-1000 | RSP-D-1200

Dimension Φ x H x W
450 | 600 | 800 | 1000 | 1200x25x20 mm

Light Distribution
Direct

System Wattage
25 W | 35W | 40W | 60W | 70W

Luminous Flux
1750 lm | 2450 lm | 2800 lm | 4200 lm | 4900 lm

Direct 1500-4000

Product Code
RSP-D-1500 | RSP-D-2000 | RSP-D-3000
RSP-D-4000

Dimension Φ x H x W
1500 | 2000 | 3000 | 4000x30x25 mm

Light Distribution
Direct

System Wattage
90W | 120W | 180W | 240W

Luminous Flux
6300 lm | 8400 lm | 12600 lm | 16800 lm

DIRECT-INDIRECT

Provides light upward and downward. Can bring a softer ambient glow.



Direct-Indirect 450-1200

Product Code
RSP-DI-450 | RSP-DI-600 | RSP-DI-800
RSP-DI-1000 | RSP-DI-1200

Dimension Φ x H x W
450 | 600 | 800 | 1000 | 1200x40x20 mm

Light Distribution
Direct-Indirect

System Wattage
40W | 50W | 60W | 70W | 90W


Luminous Flux
2800 lm | 3500 lm | 4200 lm | 4900 lm | 6300 lm

All ring0 Slim carry the following specifications		
GENERAL	Luminaire Type	Pendant
	Body Construction	Highest grade extruded aluminum
	Surface Finishes	Texture White Texture Black Texture Grey Any Other RAL color possible on Request
IP Rating		40
LED	Light Source CCT	LED 3000K 4000K 5700K TW (Tunable White) 2700-6500K
	CRI	80+, 90+ [Available on request]
	MacAdam Step	3
Power Factor		0.94
Fixing System		1500 mm long steel wires with height adjustment system
Diffuser		Satin finished Opal Diffuser
Driver		Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App

All ring0 Slim are available in the following colours




RINGO SLIM VERTICAL IS AVAILABLE IN MULTIPLE DIAMETERS

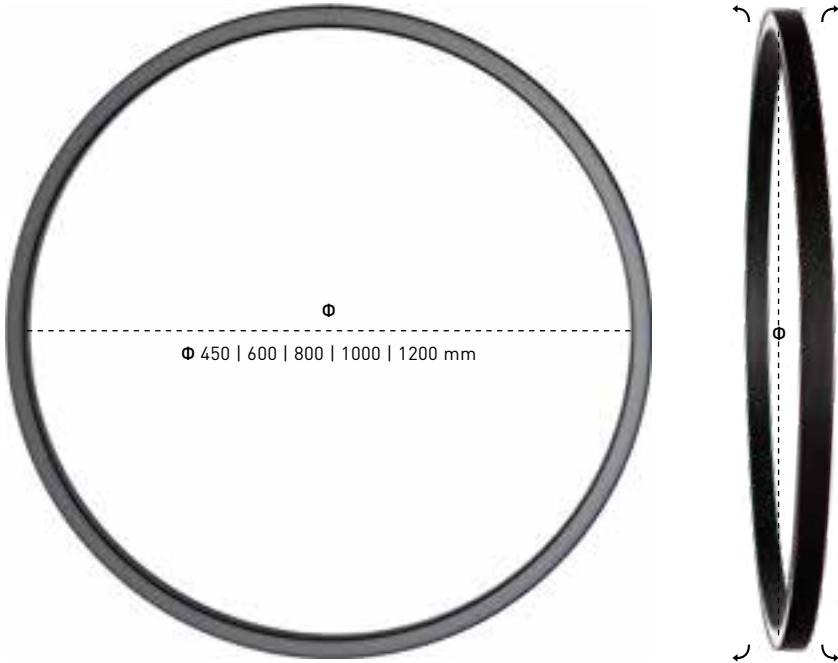

ring0 Slim Vertical

DIRECT

A vertical luminaire with direct lighting suspended from the ceiling with a transparent wire.



Product Code
RSPV-D-450 | RSPV-D-600 | RSPV-D-800
RSPV-D-1000 | RSPV-D-1200

Dimension Φ x H x W
450 | 600 | 800 | 1000 | 1200x25x20 mm


Light Distribution
Direct

System Wattage
25 W | 35W | 40W | 60W | 70W

Luminous Flux
1750 lm | 2450 lm | 2800 lm | 4200 lm | 4900 lm

DIRECT-INDIRECT

A vertical luminaire with front and back lighting suspended from the ceiling with a transparent wire.



Product Code
RSPV-DI-450 | RSPV-DI-600 | RSPV-DI-800
RSPV-DI-1000 | RSPV-DI-1200

Dimension Φ x H x W
450 | 600 | 800 | 1000 | 1200x40x20 mm

Light Distribution
Direct-Indirect

System Wattage
40W | 50W | 60W | 70W | 90W

Luminous Flux
2800 lm | 3500 lm | 4200 lm | 4900 lm | 6300 lm

All ring0 Slim Vertical carry the following specifications

GENERAL	Luminaire Type	Pendant in Vertical
	Body Construction	Highest grade extruded aluminum
	Surface Finishes	Texture White Texture Black Texture Grey Any Other RAL color possible on Request
	IP Rating	40
LED	Light Source CCT	LED 3000K 4000K 5700K TW (Tunable White) 2700-6500K
	CRI	80+, 90+ [Available on request]
	MacAdam Step	3
	Power Factor	0.94
	Fixing System	1500 mm long steel wires with height adjustment system
	Diffuser	Satin finished Opal Diffuser
	Driver	Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App

All ring0 Slim Vertical are available in the following colours

