


6

## Soft Square

Unites inspiration and function, adding a pleasant atmosphere while giving character to any room.

---

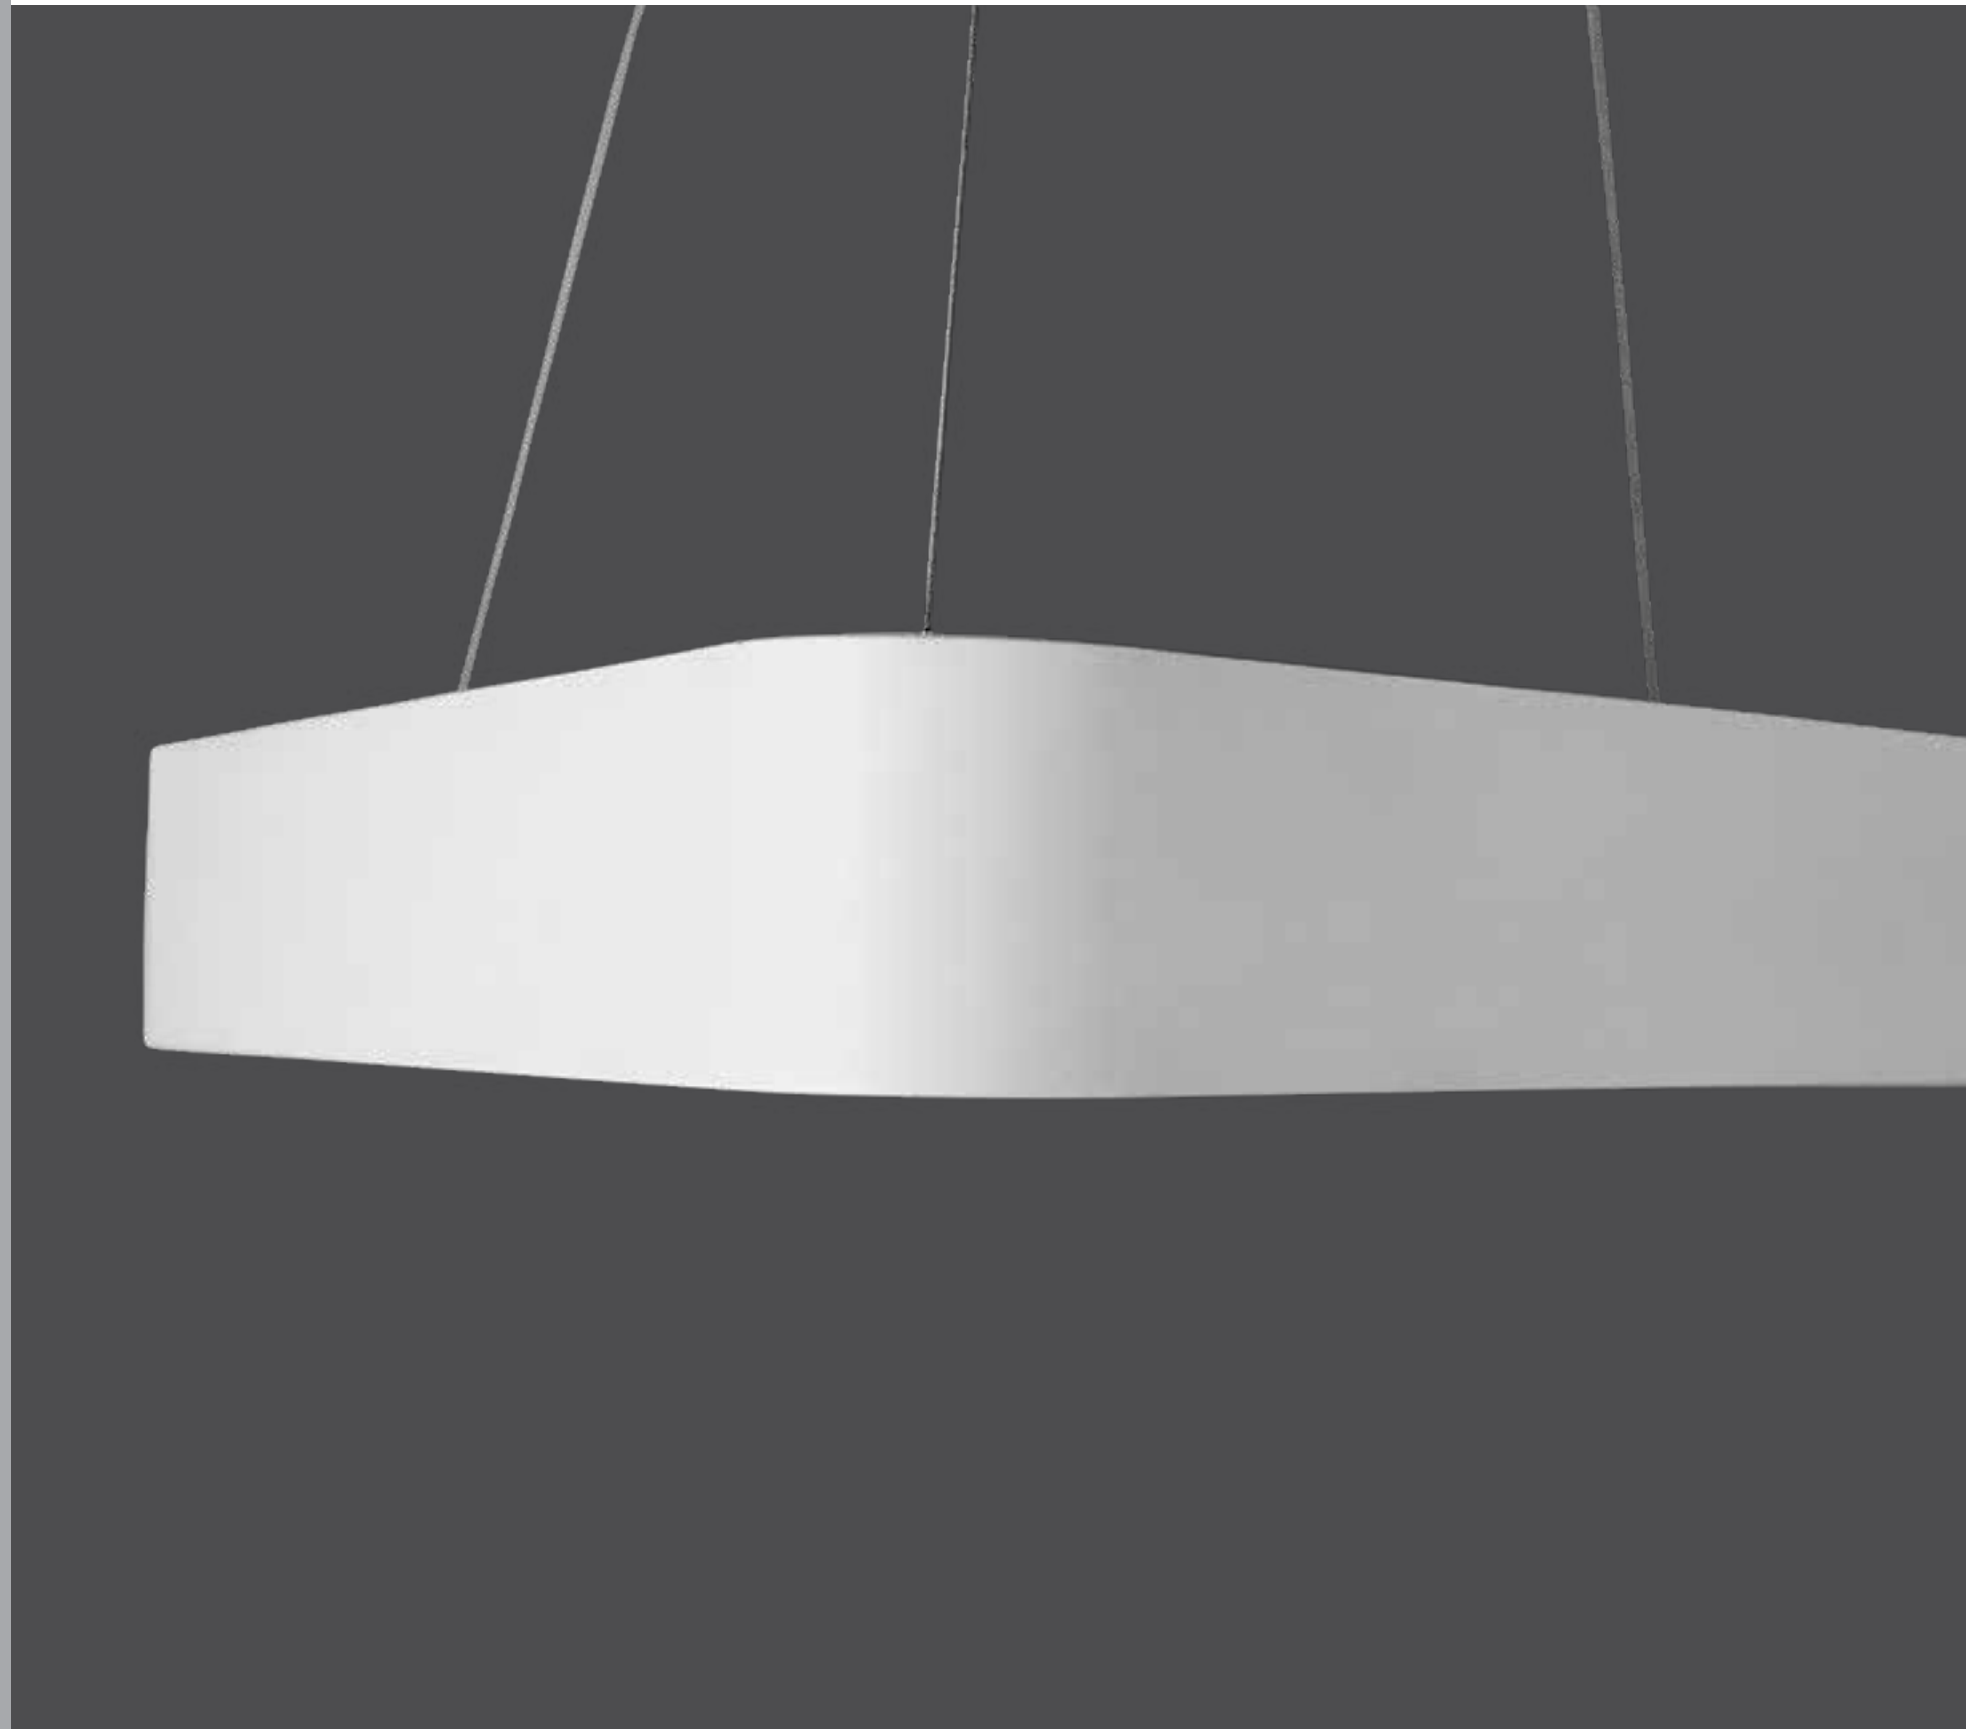



Belief in continuous refinement




# Soft Square

Soft Square can be mounted in three ways

## RECESSED

Luminaire directly installed into a hollow opening in a ceiling.



**Product Code**  
SSR-300 | SSR-400 | SSR-600  
SSR-900 | SSR-1200

**Luminaire Type**  
Recessed

**Dimension L x W x H**  
300x300 | 400x400 | 600x600 |  
900x900 | 1200x1200x85 mm


**Fixing System**  
Mounting Bracket for Recessed

**System Wattage**  
25W | 35W | 45W | 75W | 100W

**Luminous Flux**  
1750 lm | 2450 lm | 3150 lm  
5250 lm | 7000 lm

## CEILING

Flush-mount luminaires attached to the ceiling.



**Product Code**  
SSC-300 | SSC-400 | SSC-600  
SSC-900 | SSC-1200

**Luminaire Type**  
Ceiling Mounted

**Dimension L x W x H**  
300x300 | 400x400 | 600x600 |  
900x900 | 1200x1200x85 mm


**Fixing System**  
Surface Mounted with Screw

**System Wattage**  
25W | 35W | 45W | 75W | 100W

**Luminous Flux**  
1750 lm | 2450 lm | 3150 lm  
5250 lm | 7000 lm

## PENDANT

Luminaire suspended from the ceiling with a transparent wire.



### Pendant 300 | 400

**Product Code**  
SSP-300 | SSP-400

**Luminaire Type**  
Pendant

**Dimension L x W x H**  
300x300 | 400x400x85 mm

**Fixing System**  
1500 mm long steel wires with  
height adjustment system

**System Wattage**  
25W | 35W

**Luminous Flux**  
1750 lm | 2450 lm

### Pendant 600-1200

**Product Code**  
SSP-600 | SSP-900 | SSP-1200

**Luminaire Type**  
Pendant


**Dimension L x W x H**  
600x600 | 900x900 | 1200x1200x85 mm

**Fixing System**  
1500 mm long steel wires with  
height adjustment system

**System Wattage**  
45W | 75W | 100W

**Luminous Flux**  
3150 lm | 5250 lm | 7000 lm

The Soft Square Pendant 600-1200 luminaire has two wiring options

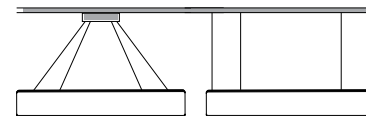

All Soft Square carry the following specifications

GENERAL	<b>Body Construction</b>	Highest grade extruded aluminum
	<b>Surface Finishes</b>	Texture White Texture Black Texture Grey Any Other RAL color possible on Request
	<b>IP Rating</b>	40

LED	<b>Light Source</b>	LED
	<b>CCT</b>	3000K   4000K   5700K   TW (Tunable White) 2700-6500K Possible only for 600 mm   900 mm
	<b>CRI</b>	80+, 90+ (Available on request)
	<b>MacAdam Step</b>	3

<b>Power Factor</b>	0.94
---------------------	------

OPTICAL	<b>Light Distribution</b>	Direct
	<b>Diffuser</b>	Satin finished Opal Diffuser

<b>Driver</b>	Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App
---------------	--

All Soft Square are available in the following colours

