

8 LID

Distinctive symmetrica design impresses with its timelessness, the prefect centre of attention in a room.





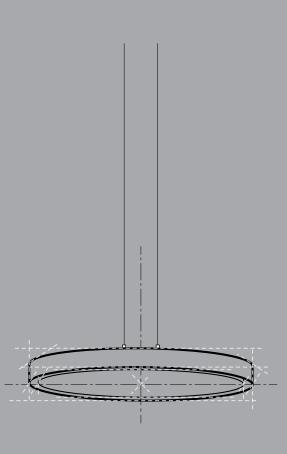

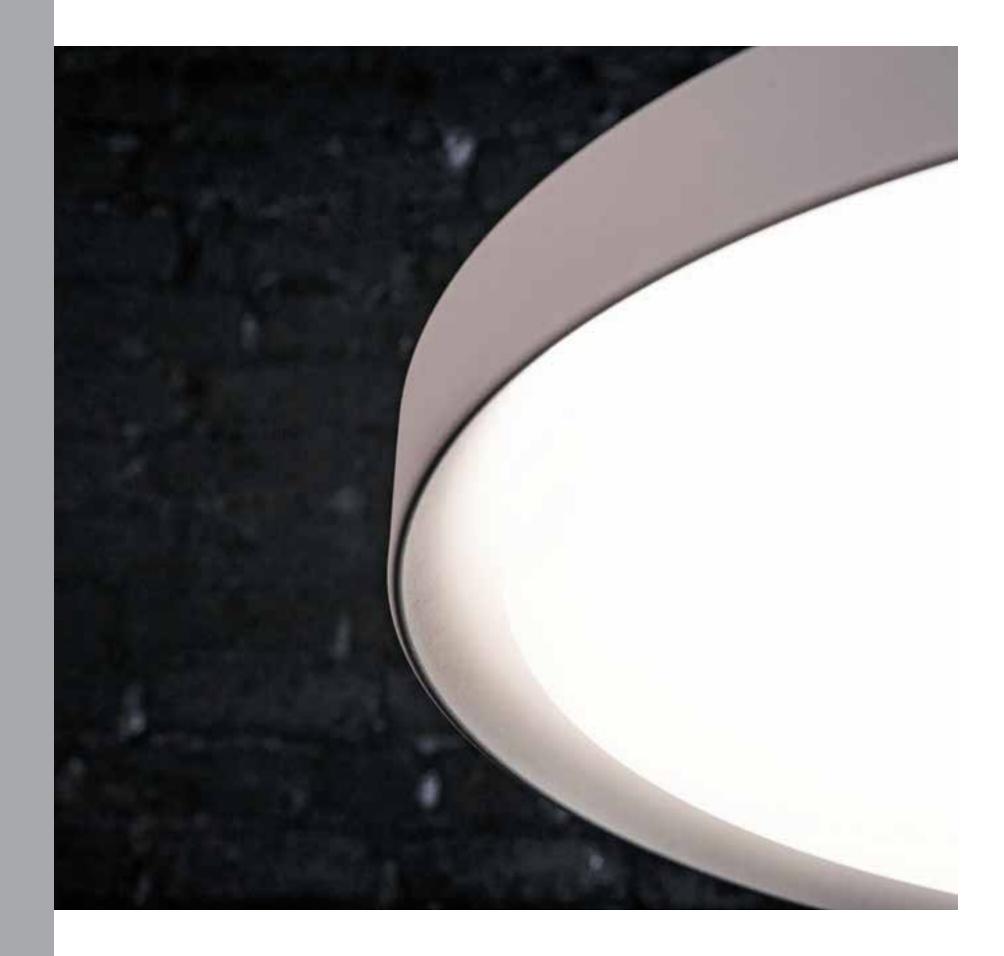







Lid

Lid can be mounted in three ways

All Lid luminaires hava a visible height of 45 mm only



CEILING

Flush-mount luminaires attached to the ceiling.


PENDANT

Luminaire suspended from the ceiling with a transparent wire.

WALL

Luminaire mounted on the wall.





Product Code

LIDC-575 | LIDC-775 | LIDC-975

Luminaire Type Ceiling Mounted

Dimension Φ x VH x TH

575 | 775 | 975x45x90 mm

Fixing System Surface Mounted with Screw

Diffuser

Satin finished Opal Diffuser

3150 lm | 4200 lm | 5250 lm

System Wattage 45W | 60W | 75W

Luminous Flux

Product Code LIDP-575 | LIDP-775 | LIDP-975

Luminaire Type Pendant

Dimension Φ x VH x TH 575 | 775 | 975x45x90 mm

Fixing System

1500 mm long steel wires with height adjustment system

Satin finished PC Opal Diffuser (SOD) from Germany

System Wattage 45W | 60W | 75W

Luminous Flux

3150 lm | 4200 lm | 5250 lm

The Lid Pendant luminaire has only one wiring option



Product Code

LIDW-575 | LIDW-775 | LIDW-975

Luminaire Type

Wall Mounted

Dimension Φ x VH x TH 575 | 775 | 975x45x90 mm

Fixing System

Wall Mounted with Screw

Diffuser

Satin finished PC Opal Diffuser (SOD) from Germany

System Wattage

45W | 60W | 75W

Luminous Flux

3150 lm | 4200 lm | 5250 lm



CRI

d Body Construction Highest grade extruded aluminum

Surface Finishes Texture White Texture Black Texture Grey
Any Other RAL color

possible on Request 40

All Lid carry the following

specifications

Light Source CCT LED

3000K | 4000K | 5700K | TW (Tunable

White) 2700-6500K 80+, 90+ (Available

on request)

MacAdam Step

Power Factor 0.94

Light Distribution Direct

Driver

Non-Dimmable DALI Dimmable 0-10V Analogue Bluetooth 4.0 CASAMBI remote control through App

All Lid are available in the following colours

